1737

1737

CITY ENGINEER'S OFFICE

MICROFILMED
DEC 29 1964

MADE IN U.S.A.

Our Leather Bound Engineers Note Books are carried in the following rulings:

No. 380 LEVEL BOOK.	Left and Right Hand Page the same as Left Hand Page of this Book.
No. 382 FIELD BOOK.	Left Hand Page as in this Book, Right Hand Page 4x4 to the inch, Center Line Red.
No. 384 MINING TRANSIT BOOK.	Left Hand Page as in this Book, Right Hand Page 8x8 to the inch, Center Line Red.
No. 385 FIELD BOOK.	Left Hand Page as in this Book, Right Hand Page 8 vertical and 4 horizontal lines to the inch, Center Line Red.

We also carry the Note Books listed above, bound in extra strong Fabri-Hide (otherwise the same quality of book,) which can be furnished at a somewhat lower price.

In ordering Fabri-Hide covered books, add the letter "F" to catalog number.

THE FREDERICK POST CO.

ENGINEERING and DRAFTING SUPPLIES

P. O. Box 803 **CHICAGO**

INDEXED

to page # 58

39-45 - X-Sect Alley Blk 11 - Kimballs Sub
46-48 - X- Sect " Blk 281 - Pac Beach

Cross Section Alley's Block 47-46 Tract # 1368
Resub of Blocks 41 to 48 Fairmount Add.
Tract # 1368

INDEXED

Sept 24-46
Sisson
McCoy
Haddel
Allen

Indexed
C.S.K.

1

Work Order # 1211

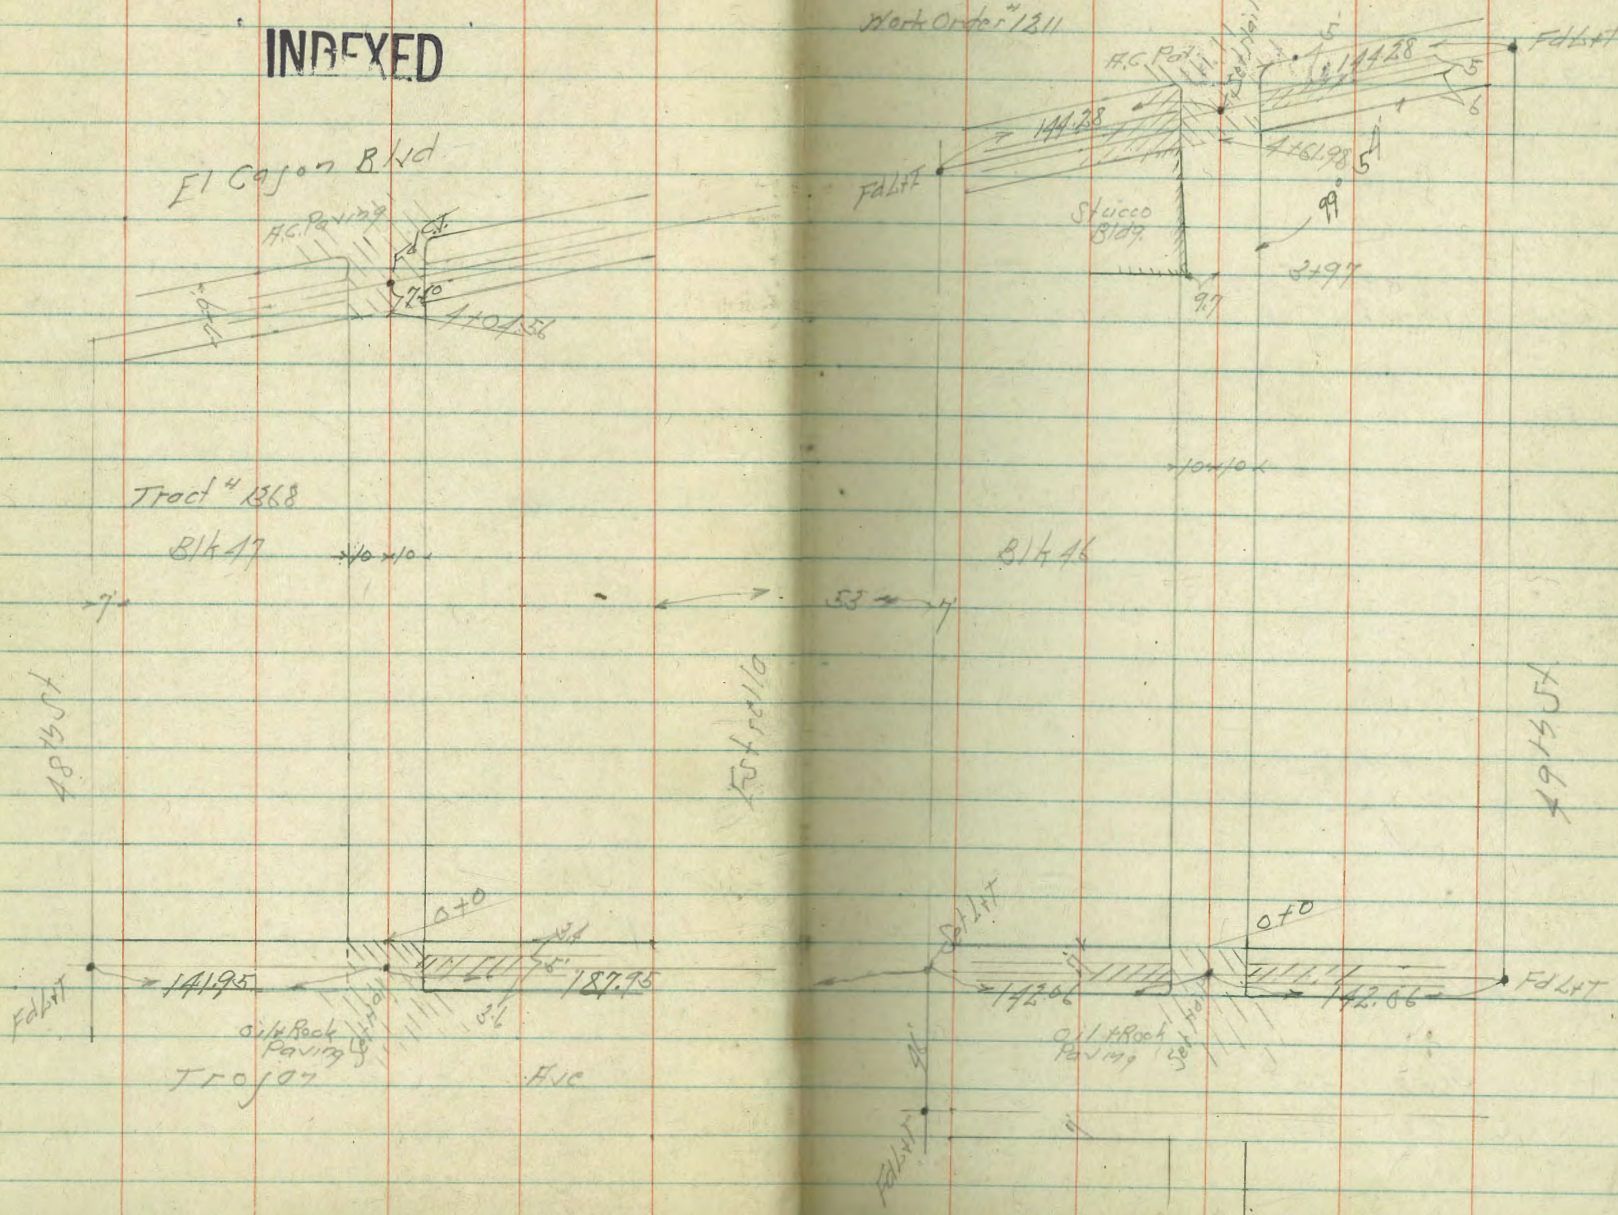

Cross Section Alley Block 47 Tract #1368
Resub Blks 41 to 48 Fairmount Add.
From Trojan to El Cajon Blvd. Bet 48th x Estrella

Sketch Page 1

						Indexed C.S.K.	Lt = W		℄	Rt = E	
+95							346.76 5.94 16 = Hly Do. Gar. Conc. Floor				
+78							346.67 6.03 16 = Sly Do Garage Conc Floor			348.09 4.61 15.2 = Sly Do Garage Conc Floor	
+75	10.3 Rt of ℄ = Hly Board Fence 10.2 Lt of ℄ = Hly Power Pole										
+50							345.10 7.6 25	345.30 7.4 10	345.60 7.1	345.80 6.9 10	
+10							345.30 7.4 10		345.10 7.6	345.20 7.5 10	
0+0	10.5 Rt of ℄ = Sly Board Fence = N Line Trojan Ave						344.58 8.12 10 Hyp		344.70 8.00	344.74 7.96 9.9 = Gutter	345.26 7.44 9.9 = Cb
0-12	= N Cb Line of Trojan Ave						344.14 8.56 10 = Hly Pav		344.19 8.51 352.70	344.30 8.40 11 = Gutter	345.02 7.68 11 = Cb
TP	7.52	352.70	1.71	345.18							
BM	2.61	346.89		344.28	NE BP Trojan + 48th St						

		Lt	℄	Rt
+55				348.64 4.06 21.1 = ℄ Garage Conc Floor
+50	9.8 Lt of ℄ = Sly 6.1 H+S Shed	347.30 5.4 10	347.60 5.1	348.30 4.4 10
+41		347.43 5.27 14.5 = ℄ Garage Conc Floor		
+17		347.16 5.54 14.6 = ℄ Garage Conc Floor		
1+0		346.60 6.1 25	346.60 6.1 10	346.40 6.3
				347.0 5.7 10
				347.80 4.9 25
0+98				348.09 4.61 15.1 = Hly Do Gar Conc Floor
	352.70		352.70	

TP	8.66	358.00	3.36	349.34	
+50	10' Rt of ℄ - Sly Woven wire Fence				
+42					
+19					
℄ +15					
+09	10' Lt of ℄ - Nly Board Fence				
+70	9.9' Lt of ℄ - Sly Board Fence 10' Rt of ℄ - Nly Board Fence				
+89					
+75	9.7' Lt of ℄ - Nly Power Pole				
+68	10' Rt of ℄ - Sly Board Fence				
1+67					
		352.70			

Lt	℄	Rt
348.7 4.0 20	349.20 3.5 10	349 3.7
349.30 3.4 10	349.5- 3.2 25	
349.15 3.57 177 = ℄ Garage Conc. floor		
348.98 3.79 181 = ℄ Garage Conc. floor		
348.50 4.2 10	348.4 4.3	348.30 4.2 10
348.0 4.7 10	348.16 4.54 - Sewer MH on Rim	348.60 4.1 10
347.98 4.72 1 = ℄ Garage Conc. floor		

	Lt	℄	Rt
+85	350.1 7.9 13-Graded Lot	353.1 4.9 /0	353 5.0	353.5 4.5 /0
+50	350 8.0 13-Graded Lot	351.9 6.1 /0	351.6 6.4	351.8 6.2 /0
+25	349.8 8.2 13-Graded Lot	351.10 6.9 /0	350.8 7.2	350.9 7.1 /0
0+00	92 Lt of ℄ - W/ Power Pole	349.2 8.7 3'0	350.1 7.9 /0	349.9 8.1	350 8.0 /0	350.5 7.5 25
+93					350.9 7.10 90.3-1 Garage Conc Floor
+86	104 Rt of ℄ - W/ Wood Wire Fence				
1+55		349.24 8.76 17.9-1 Garage Conc Floor			
	358.00		358.00		

						Lt		℄	Rt	
BM			6.42	351.58	H.W. B.P. El Cajon + Estrella 351.52					
+20.80 = S. Cb Line El Cajon Taken on Diag						350.4 7.60 11 = Cb	349.81 8.19 11 = Gutter	349.82 8.18	349.84 8.16 10.5 = Gutter	350.4 7.60 10.5 = Cb
+04.56 = S.L. El Cajon Blvd Taken on Line of El Cajon						350.52 7.48 10.5 = Cb	350.33 7.67 10.5 = Gutter	350.18 7.82	350.36 7.64 10.2 = Gutter	350.58 7.42 10.2 = Cb
4+0						350.4 7.6 15 = Graded Lot	350.4 7.6 10	351.2 6.8	353.4 4.6 5	353.4 4.6 10
		358.00						358.00		

Cross Section Alley Block 46 Tract #1368
Resub of Blocks 41 to 48 Fairmount Add.
From Trojan Ave to El Cajon Blvd Bet Estrella + 49th St

Sketch Page 1

INDEXED

Work order #230 | Indexed C.S.K. | Sept 25-46 Sisson McCoy Waddel Allen

						Lt = W		℄		Rt = E	
+64						348.44 7.73 13 = ℄ Garage	348.25 7.92 11.6 = ℄ Conc Apron	348.27 7.8 10	348.87 7.3	349.37 6.8 10	349.44 6.73 11.3 = ℄ 4.4 Conc Walk
+56										349.38 6.79 11.6 = ℄ Conc Apron	350.01 6.16 15.6 = ℄ Garage Conc Floor
+44						347.97 8.2 20	348.67 7.5 10	348.67 7.5	348.67 7.5 10	348.68 7.49 11.6 = ℄ Conc Apron	348.97 7.20 14.6 = ℄ Garage Conc Floor
+30	11.4' Rt of ℄ = N Ly Wire Fence										
+03	11.5' Lt of ℄ = Sly Wire Fence										
0+0	= N L Trojan 11.1 Rt of ℄ = Sly Wire Fence					348.83 7.34 9.8 = Cb	348.49 7.68 9.8 = Gutter	348.57 7.60	348.63 7.54 10.3 = Gutter	349.23 6.94 10.3 = Cb	
0-12	= N Cb Line Trojan					348.65 7.52 11 = Cb	348.02 8.15 11 = Gutter	348.19 7.98	348.37 7.80 11 = Gutter	349.02 7.15 11 = Cb	
TP	7.33	356.17	4.42	348.84				356.17			
BM	8.98	353.26		344.28	NW BP Trojan + 48th St						

+50	10.5 Rt of ℄ = 5 Ly Wire Fence
	10.1 Lt of ℄ = 4 Ly Picket Fence
+43	
+25	10.4 Rt of ℄ = 4 Ly Picket Fence
	10.1 Lt of ℄ = Picket Fence
2+10	10.4 Rt of ℄ = Picket Fence
+84	8.9 Lt of ℄ = 4 Ly Power Pole
+70	
+35	
+25	10.3 Lt of ℄ = 4 Ly Board & 5 Ly Picket Fence
1+0	10.6 Rt of ℄ = 5 Ly Picket Fence
+96	
+75	10.9 Lt of ℄ = 5 Ly Board Fence
+72	8.6 Lt of ℄ = 4 Ly Power Pole
0+47	

356.17

Lt.	℄	Rt	
351.37	351.37	350.47	350.27
4.8	4.8	5.7	5.9
25	11	10	
350.57	350.76		
5.6	5.41		
10	15.6 = 8 Garage Conc. Floor		
350.87	350.97	351.37	
5.5	5.5	4.8	
10		10	
351.47	351.27	351.37	351.97
4.7	4.9	4.6	4.3
25	10		10
352.67			
3.5			
25			
351.57	351.07	351.07	351.57
4.6	5.1	5.1	4.6
25	10		10
352.37			
3.8			
25			
349.97	349.77	350.47	350.54
6.3	6.4	5.7	5.63
10		10	11 = 5 Ly Conc Floor
350.72			
5.45			
15 = 11 Ly Garage Conc. Floor			
350.11	350.64		
6.06	5.53		
11.1 = 5 Ly Conc Floor	15.9 = 5 Ly Garage Conc. Floor		

356.17

		Lt	℄	Rt
1+60			350.58	350.78	351.08
			7.7	7.5	7.2
			10		10
1+50	10.2 Rt of ℄ = Hly Picket & Sly Board Fence				
1+30		349.38	349.78	350.48	350.48	351.08
		8.9	8.5	7.8	7.8	7.2
		25	10	7		10
1+25	10.3 Lt of ℄ = Nly Picket Fence			358.28		
TP	7.7	358.28	5.60	350.57		
1+16	9.6 Lt of ℄ = Wly Power Pole		349.47	350.37	350.57	350.87	350.97
			6.7	5.8	5.6	5.3	5.4
			25	10		10	25
1+00	10.1 Rt of ℄ = Sly Picket Fence						
0+90						351.07
						5.1
						16.6 = ℄ Garage
						Diff Floor
0+83	10.3 Rt of ℄ = Wly Wire Fence		349.67	349.97	350.27	350.37	350.47
0+70			6.5	6.2	5.9	5.9	5.9
			25	10		10	25
0+67	10.8 Lt of ℄ = Sly Picket Fence						
0+57				349.98			
				6.19			
				16.5 = ℄ Garage			
				Slab			
	356.17				356		

						Lt		℄	Rt	
BM			6.70	351.58	HW BP El Cajon Estrella 351.52					
+78.2	= S Cb Line Taken on Diag					352.73 5.55 10.7=Cb	352.10 6.18 10.7=Gutter	352.34 5.94	352.55 5.73 10.3=Gutter	353.18 5.10 10.3=Cb
+61.98	= S.L. El Cajon Blvd Taken on Line of El Cajon					352.96 5.32 10.2=Cb	352.69 5.59 10.2=Gutter	352.55 5.73	353.06 5.22 10.2=Gutter	353.46 4.82 10.2=Cb
+35							352.08 6.2 9.9=El Stucco Bldg.	352.18 6.1	352.38 5.9 10	353.40 4.88 12.3=Doorway on Floor
+14	9.6 Rt of ℄ = Nly Board Fence						351.68 6.6 9.8=El Stucco Bldg.	351.48 6.8	351.68 6.6 10	
4+0										
3+93							352.25 6.03 9.7=Sly 3.7 Conc. Landing			
		358.28						358.28		

358.28 6.1 / 352.18

358.28 5.9 / 3.38

Cross Section Alley Block 45 Tract # 1368
Resub Blocks 41 to 48 Fairmount Add.
Levels next page
#1662-66
#1558-2

INDEXED

Sept. 25-46
A. Sisson
McCoy
Waddel
Allen

Indexed
C.S.K.

Work Order 1211

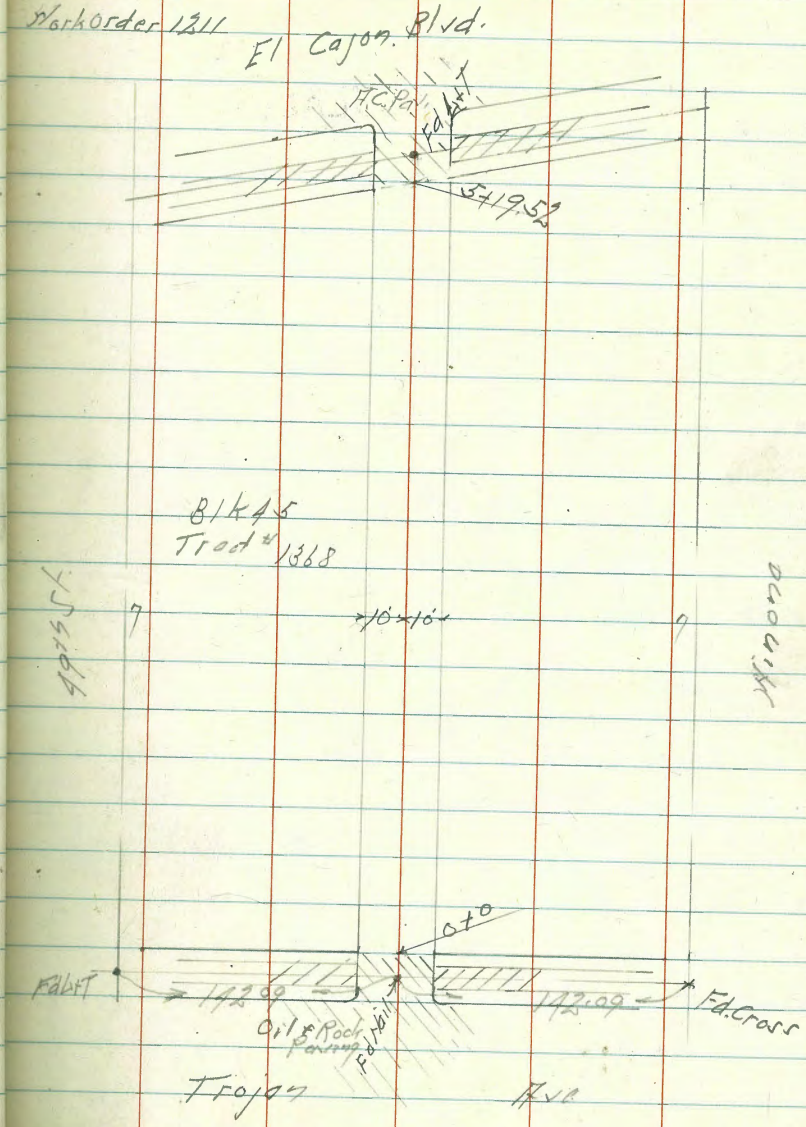

Cross Section Alley Block 45 Tract # 1368
Re Sub Blocks 41 to 48 Fairmount Add.
From Trojan to El Cajon Blvd Bet. 49th St + Winona

Sketch Page 11

						Lt = W	℄	Rt = E
+84	12' Lt of ℄ = Nly Picket Fence							
+67	9.3 Rt of ℄ = ℄ + Sly 4' Cypress Hedge							358.21 3.73 12.8 = ℄ Garage Conc Floor
+63								
+55						356.61 5.33 11 = Nly 0.3 Conc Wall	356.64 5.3 10	357.14 4.8 361.94	357.74 4.2 10
TP	5.20	361.94	7.20	356.74				
+43	11.2 Lt of ℄ = Sly Picket Fence							
+29						356.84 7.10 10.6 = Top 0.3 Conc Wall	356.74 7.2 10	357.14 6.8	357.74 6.2 9 / 358.39 5.55 9.4 = Nly Top 2x6 Plank / 358.75 5.19 10.9 = SW Cor Garage Conc Floor
+13	11' Lt of ℄ = ℄ + Nly 4' Hedge							
0+0	= N.L. Trojan					357.15 6.79 10.2 = Sly 0.30 Conc Wall	357.45 6.49 10.2 = Cb	357.28 6.66 10.2 = Gutter	357.35 6.59 / 357.69 6.25 9.8 = Gutter / 358.50 5.44 9.8 = Cb
0-02'	11' Lt of ℄ = ℄ + Sly 4' Hedge 11' Rt of ℄ = ℄ + Sly 2' Hedge							
0-12	= N Cb Line Trojan					357.34 6.60 10.5 = Cb	356.83 7.11 10.5 = Gutter	357.30 6.64	357.62 6.32 10.5 = Gutter / 358.31 5.63 10.5 = Cb
BM	1.11	363.94		362.83	N.W. B.P. Trojan + Winona			363.94	

		Lt		℄		Rt	
2+0	9.4 Lt of ℄ = Wly Power Pole	357.64 4.3 25	357.94 4.6 10	358.04 3.9	358.24 3.7 10	358.44 3.5 25	
+97		357.64 4.30 18.1 = Wly 5 Car Garage Conc Floor	357.47 4.47 14.4 = Wly Conc. Apron				
+75	10.8 = ℄ x Sly 1.5' Hedge	357.60 4.34 18.1 = Sly 5 Car Garage Conc Floor	357.54 4.40 14.4 = Sly Conc Apron	357.24 4.7 10	357.24 4.7	357.34 4.6 10	
+55							
+35		356.64 5.3 25	356.84 5.1 10	357.04 4.9	357.14 4.8 10	357.24 4.6 25	
+27	10' Rt of ℄ = ℄ x Wly 4' Cypress Hedge						
1+0	10.4' Lt of ℄ = Wly Power Pole	356.64 5.3 20	357.04 4.9 10	357.34 4.6	357.44 4.5 10		
0+91		356.76 5.18 16.5 = ℄ Garage Conc Floor					
	361.94			361.94			

						Lt.		℄	Rt.	
+44						357.22 7.64 15.1 = Nly 4 Car Garage Conc Floor	356.46 8.4 10	356.56 8.3	356.56 8.3 10	357.26 7.6 15
+04						357.23 7.63 15.3 = Sly 4 Car Garage Conc Floor				
TP	6.46	364.86	3.54	358.40	Nail Pole 10' Lt of ℄ 3+0			364.86		
3+0	10' Lt of ℄ = Nly Power Pole						357.54 4.4 10	357.54 4.4	357.44 4.5 10	358.44 3.5 25
+82 +75	10.5 Lt of ℄ = ℄ + Nly 2' Hedge						357.84 4.1 10	357.94 4.0	358.14 3.8 10	
+56 +50	10.6 Lt of ℄ = ℄ + Sly 2' Hedge						358.24 3.7 10	358.54 3.4	358.74 3.2 10	
2+27	10.2 Rt of ℄ = Sly Woven Wire Fence						358.54 3.4 10	358.58 3.36 1.6 = Sewer M.H. on Rim	358.84 3.1 10	
		361.94						361.94		

		Lt.		℄		Rt	
+95	10.5 Lt of ℄ = W'ly Power Pole						
+83	10.8 Rt of ℄ = S. W. Cor Stucco Bldg					362.98 1.88 11.2 = outlet + W'ly Cl. Bldg Drain Flow Line	
+55		359.16 5.7 25	359.76 5.1 10	361.76 3.1 2	361.86 3.0	362.16 2.7 10	362.56 2.3 20
+25		357.16 7.7 25	357.86 7.0 10	358.56 6.3	359.16 5.7 10	362.78 2.08 11.3 = W'ly 0.5' E + W Conc. Wall	362.54 2.3 15 = Ground
+04						359.21 5.65 11.5 = ℄ 4' Wide Conc Steps Bottom	362.09 2.77 16.5 = Top Conc Steps
4+0	9.9 Lt of ℄ = W'ly Power Pole	356.76 8.1 25	357.26 7.6 10	357.76 7.1	358.46 6.4 10		
+75	10.1 Rt of ℄ = W'ly Woven Wire Fence						
3+65		356.96 7.9 25	356.56 8.3 10	356.56 8.3	356.76 8.1 10	357.36 7.5 15	
	364.86			364.86			

BM			9.53	355.33	SW. B.P. El Cajon + 49th 355.37						
+35.76	= S. Cb Line of El Cajon Taken on Diag.					363.42 1.44 11 = Cb	362.91 1.95 11 = Gutter	363.60 1.26	364.06 0.80 11 = Gutter	364.59 0.27 11 = Cb	
+19.52	= S. L. El Cajon Blvd Taken on Line of El Cajon					363.35 1.51 10.2 = Cb	363.17 1.69 10.2 = Gutter	363.49 1.37	364.10 0.76 9.9 = Gutter	364.52 0.34 9.9 = Cb	
540						361.56 3.3 15	362.46 2.4 10	362.96 1.9 7	363.16 1.7	363.46 1.4 10	363.36 1.5 10.9 = Wh/Bldg
		364.86						364.86			

Survey of Triangular Property
Bounded by Churchward St. Euclid Ave. And
Imperial Ave.

INDEXED

Jan. 20-47

Sisson
McCoy
Waddel

WO# 210

see 6741-42-L for Sewer plans

SEE RES. 39687 FOR OPENING
ON CHURCHWARD ST.

Indexed
C.S.N.

Plotted T.P.S. 3336
McQ.

17

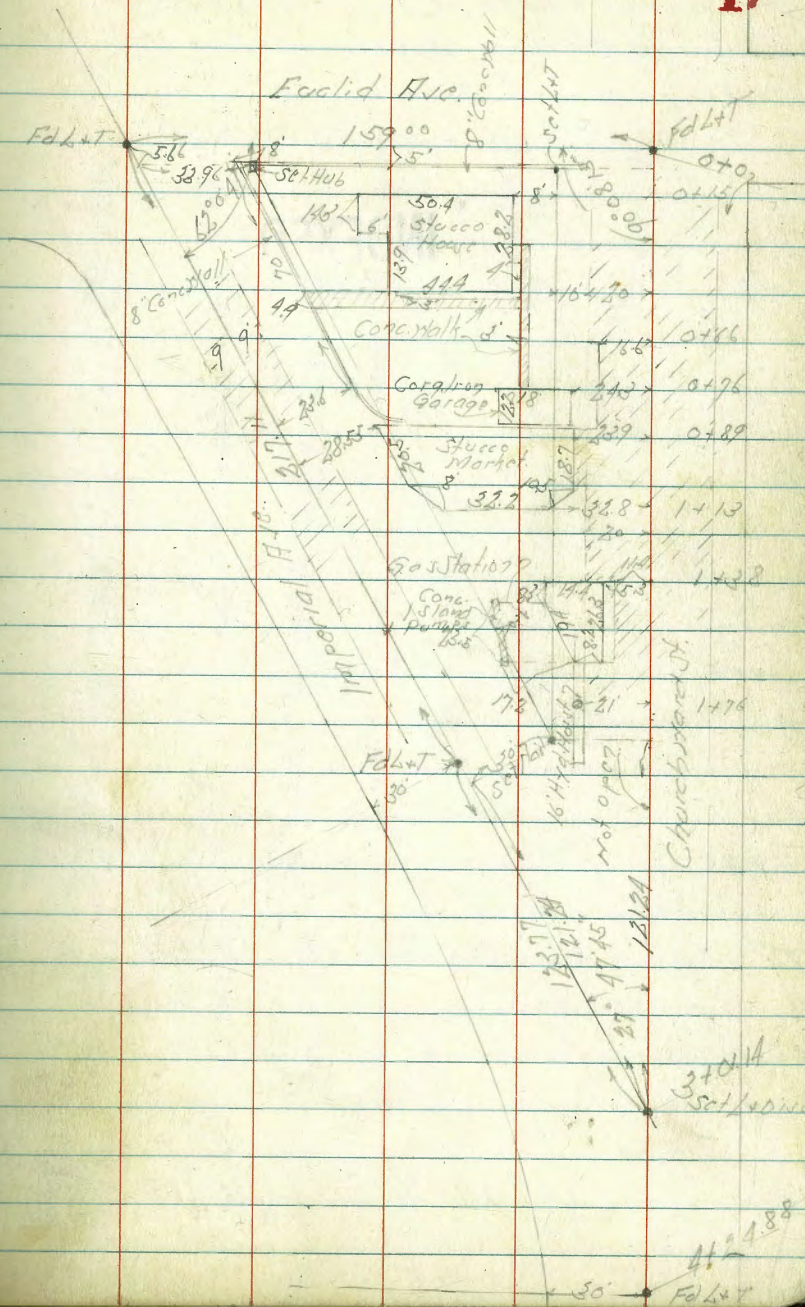

Cross Section L' Line
Proposed Through Way West of 54th St
El Cajon Blvd to Montezuma Road
Alignment #1738-46
Note:- Rt + Lt. + above ℄ - below ℄

INDEXED

Indexed
C.S.R.

Feb. 21-47
Sisson
McCoy
Waddel
Allen
W.O. 175

18

						Lt.		℄		Rt.	
+25						235.8 -43.6 108	254.1 -25.3 63	267.4 -12.0 34	279.4 4.6	286.9 +7.5 20	294.0 +14.6 42
46+0	POC					238.8 -42.5 101	247.0 -34.3 82	261.2 -19.6 49	277.4 -8.9 25	281.27 2.76 on Hub	293.5 +12.2 28
+75						220.3 -60.8 127	243.0 -38.0 87	268.4 -12.7 33	281.1 2.9	289.9 +8.8 18 = Approx ℄ Line	
+25						223.7 -50.2 105	236.4 -37.5 84	252.7 -21.2 40	264.2 -9.7 18	273.9 10.1	
TP	11.68	284.03	0.48	272.35					284.03		
45+0						224.3 -40.5 98	242.7 -22.1 55	255.7 -9.1 22	264.8 8.0		
B.M.	12.20	272.83		260.63	on ℄ Hub 44+73.38 B.C. #1738-73				272.83		

L'					
+88	For Profile		14.0	22.5	
+83	" "		16.3	220.2	= Bottom Wash
+75					
+63	For Profile		14.0	222.5	
+50					
TP	2.12	236.52	12.71	234.40	
TP	0.23	247.11	12.69	246.88	
+25					
TP	0.24	259.57	12.41	259.33	
47+0	P.O.C.				
+65	P.O.C.				
TP	0.24	271.74	12.53	271.50	
46+50					
		284.03			

Lt. ℄ Rt.

217.0	224.8	224.1	218.9	221.4	222.3	222.6	220.4	225.0	226.0
-5.3	+2.5	+1.8	-3.4	-0.9	14.2	+0.3	-1.9	+2.7	+3.7
117	100	67	50 = Bottom Wash	24		22	47 = Bottom Wash	82	116
224.9	233.4	233.0	233.4	228.2	227.2	227.4	229.2	225.6	
-3.3	+4.9	+4.8	+5.2	8.3	-1.0	-0.8	+1.0	-2.6	
120	100	67	29		27	60	94	107	
				236.52					
232.9	241.6	244.6	247.4	246.3	247.2	241.9	239.4		
-14.5	-5.8	-2.8	12.2	-1.1	-0.2	-5.5	-8.0		
124	63	28		33	58	100	143		
				259.57					
235.4	246.7	253.3	259.3	261.6	262.5	255.8			
-23.9	-12.6	-6.0	12.41 on Stub	+2.3	+3.2	-3.5			
120	60	26		29	52	104			
			270.63						
			1.11 on Hub						
			271.74						
236.9	252.6	265.5	275.2	282.7	288.9				
-38.3	-22.6	-9.7	8.8	+7.5	+13.7				
110	63	30		28	58 = Approx. L				
			284.03						

L'						Lt.			℄		Rt.	
BM			8.04	272.70	on Hub 51+45.50P 272.76 #1738-13							
TP	8.10	280.74	0.41	272.64		242.1	248.2	255.5	264.1	269.8	274.4	261.4
50+0						-21.9 102	-15.8 73	-8.5 35	9.0	+5.8 25	+10.4 44 = Top Cut	-2.6 54 = Bottom Cut
									273.05			
TP	12.22	273.05	0.08	260.83		228.9	242.0	247.7	253.4	255.0	269.2	273.3 / 263.8
+50						-24.5 104	-11.4 64	-5.7 31	7.5	+1.6 28	+15.8 68	+19.9 87 = Top Cut / +10.4 97 = Bottom Cut
									260.91			
TP	12.46	260.91	0.73	248.45		221.4	229.9	235.9	240.7	243.6	249.5	262.1
49+0						-19.3 109	-10.8 59	-4.8 32	8.5	+2.9 24	+8.8 59	+21.4 116
									249.18			
TP	12.75	249.18	0.09	236.43		217.76	216.0	218.7	225.4	229.6	232.5	238.3	243.0
+50						-11.9 111	-13.6 85 = Bottom Mosh	-10.9 71	-4.2 30	6.9	+2.9 29	+8.7 77	+13.4 120
+25						217.6 -8.0 127	217.0 -8.6 75	219.6 -6.0 59	222.8 -2.8 28	225.6 10.9	229.1 +3.5 37	232.2 +6.6 87	235.5 +9.9 117
48+0					217.3 -4.8 128	218.3 -3.8 104	218.0 -4.1 74	220.3 -1.8 65	221.2 -0.9 28	222.1 14.4	222.9 +0.8 30	224.3 +2.2 70	228.8 +6.7 110
		236.52							236.52			

L'						Lt				℄	Rt.
+50				227.6 -21.6 101	235.6 -13.6 83	249.8 +0.6 45	255.5 +6.3 31	255.8 +6.6 26	249.8 +0.6 22	249.24 8.62	
52+0			223.5 -28.2 125	240.6 -11.1 87	245.2 -6.5 66	255.4 +3.7 46	264.0 +12.3 32	264.5 +12.8 24	252.0 +0.3 17	251.69 6.17	
+50				241.0 -13.0 96	249.1 -4.9 72	261.4 +7.4 38	270.4 +16.7 24	271.0 +17.0 16	254.2 +0.2 7	253.96 3.90 on Paving	
51+25					244.5 -10.9 92	253.8 -1.6 65	264.8 +9.4 35	273.1 +17.7 20	274.0 +18.6 11	255.4 2.5	255.1 -0.3 3: St/Paving
										257.86	
TP	2.04	257.86	12.79	255.82							
TP	0.28	268.61	12.41	268.33							
+85						240.9 -36.6 109	251.6 -25.9 74	263.2 -14.3 33	276.5 -1.0 7	277.5 3.2: Top Cut	257.0 -20.5 13: Bottom Cut
+75	P.O.C.		3.13		on Stub						
50+50						244.3 -29.6 102	255.7 -18.2 57	265.8 -8.1 23	73.9 6.8	278.4 +4.5 14: Top Cut	258.1 -15.8 27
		280.74								280.74	

						Lt.					Rt.
55+0					198.6 -39.5 109	200.7 -37.4 85	240.6 +2.5 30	240.7 +2.6 27	238.9 +0.8 24	238.12 9.54	
+50					201.1 -39.3 104	205.0 -34.5 84	242.2 +1.8 30	243.1 +2.7 27	241.3 +0.9 24	240.40 7.26	
54+0					208.4 -34.2 102	213.1 -29.5 74	245.0 +2.4 30	245.0 +2.4 27	243.4 +0.8 24	242.62 5.04	
+61.8	= 24" Conc. Pipe Culvert Taken on Diag.							220.7 -23.4 64 = Flow Line 24" Conc. Pipe		244.12 3.54	231.6 -12.5 40 = Flow Line 24" Conc. Pipe
+50				202.5 -42.1 115	219.8 -24.8 88	227.2 -17.4 59	246.7 +2.1 31	247.2 +2.6 28	245.5 +0.9 24	244.63 3.03	
BM			2.99	244.67	Chisel Cross on Rock Bottom Drain 18 Rt. 53+28						
TP	2.13	247.66	12.33	245.53						247.66	
53+00.27	F.C.		213.5 -33.3 121	227.4 -19.4 91	234.5 -12.3 72	244.2 -2.6 42	249.3 +2.5 33	249.6 +2.8 28	247.8 +1.0 25	246.80 11.01 on Paving	
		257.86								257.86	

BM			5.48	287.49	07 R.R. Spike 52+37.57 L 287.53 #1738-78
TP	8.57	292.97	0.96	284.40	
TP	12.68	285.36	0.10	272.68	
TP	12.96	272.78	0.08	259.82	
TP	12.46	259.90	0.22	247.44	
		247.66			

Alignment L² Line
Proposed Throughway West of 54th St
El Cajon Blvd Parks
L Line #1738-46

5+20.50	P.O.T.	
+69.47	E.C.	18°56'
+50		17°17.61'
+25		15°11.22'
4+05		13°20.16'
+75		10°58.44'
+50		8°52.05'
+25		6°45.66'
3+0		4°39.27'
+50		0°26.49'
2+44.76	B.C. R.L.	
+10.75	E.C.	4°28.50'
2+0		4°18.34'
+50		3°02.91'
1+0		1°52.47'
+50		0°42.04'
0+21.16	= P.C.C.	

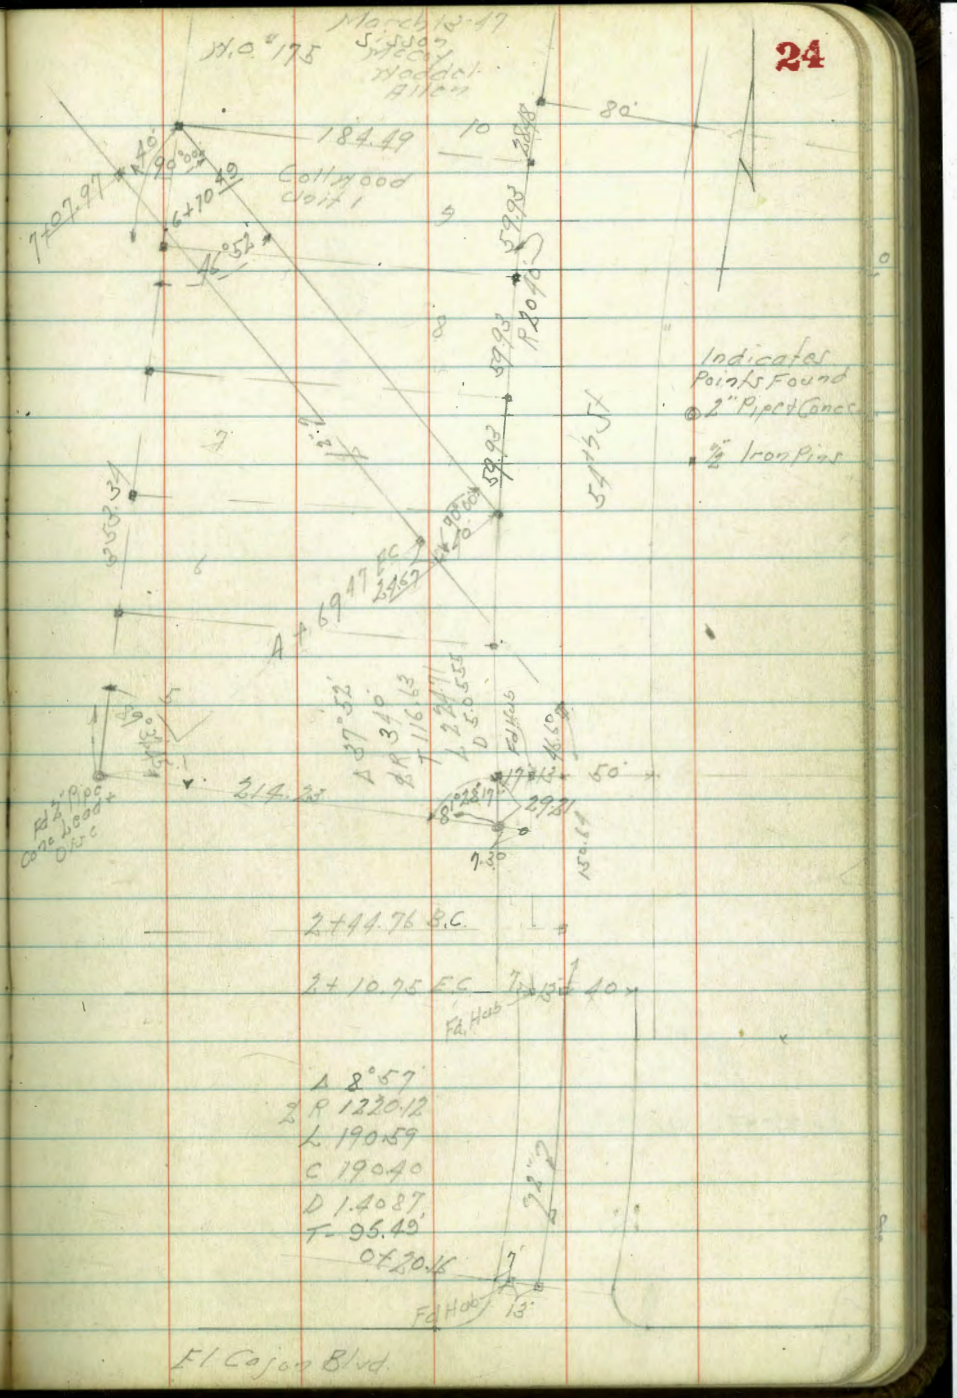

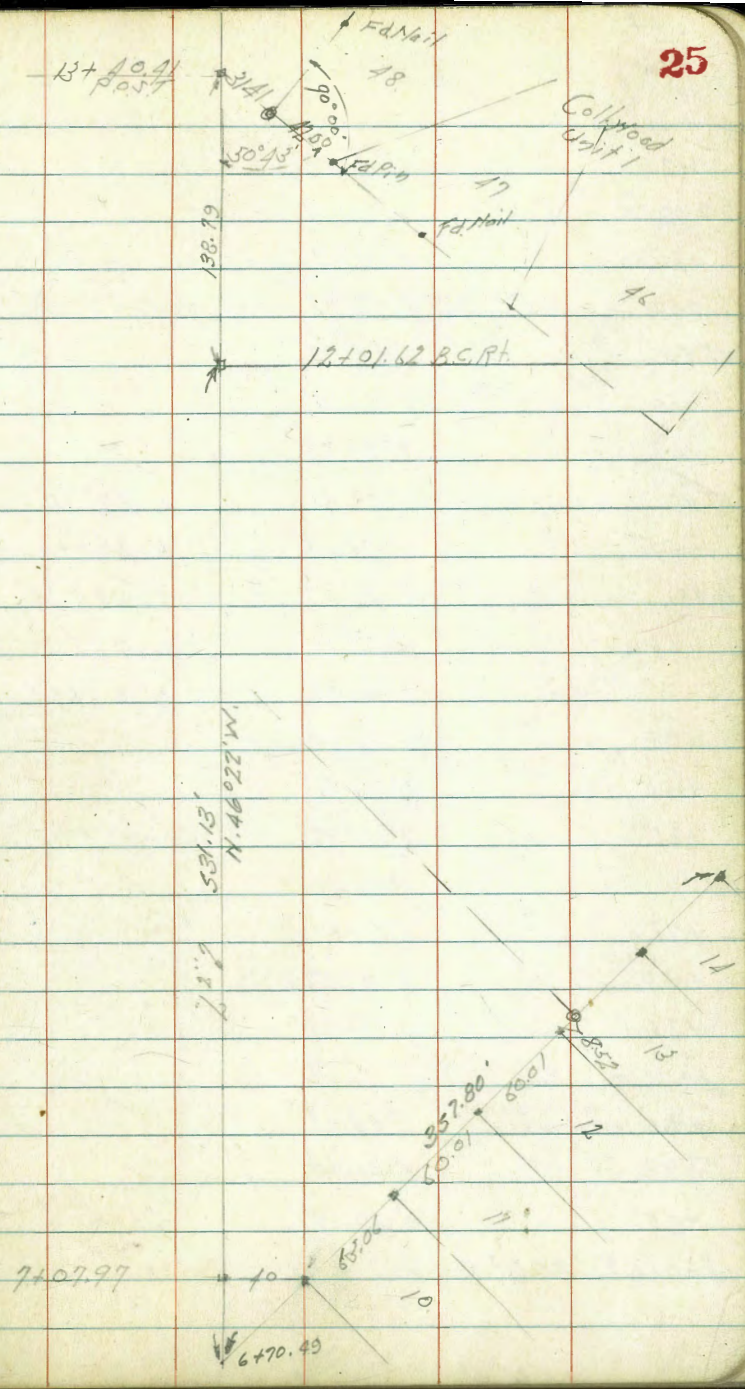
Fd Nail
13+40.41 P.O.T.
31.41
90°00'
42.50
50°43'
Fd Pin
48
Collwood Unit 1
47
Fd Nail
138.79
46
12+01.62 B.C.Rt.
531.13'
N.46°22'W.
14
13
8.52
60.01
357.80'
60.01
12
65.06
7+07.97
40
10
6+70.49

8+95.56 P.O.T

+25		10° 21.67'		
19+0		10° 00.19'		
+75		9° 38.70'		
+50	P.O.C.	9° 17.22'		
18+0		8° 34.25'	8°21.8	
+50		7° 51.28'		
+25		7° 29.79'		
17+0		7° 08.31'	Δ 27° 10'	
+50		6° 25.34'	R 2000	
16+0		5° 42.37'	T 485.34	
+50		4° 59.40'	L 948.30	
15+0		4° 16.43'	D 0.8594	
+75		3° 54.94'		
+50		3° 33.46'		
+25		3° 11.97'		
14+0		2° 50.49'		
+75		2° 29.00'		
+50		2° 07.52'		
+25		1° 46.03'		
13+0	P.O.C.	1° 24.55'		
+75		1° 03.06'		
+50		0° 41.58'		
+25		0° 20.09'		
12+01.62	B.C.R.C.			

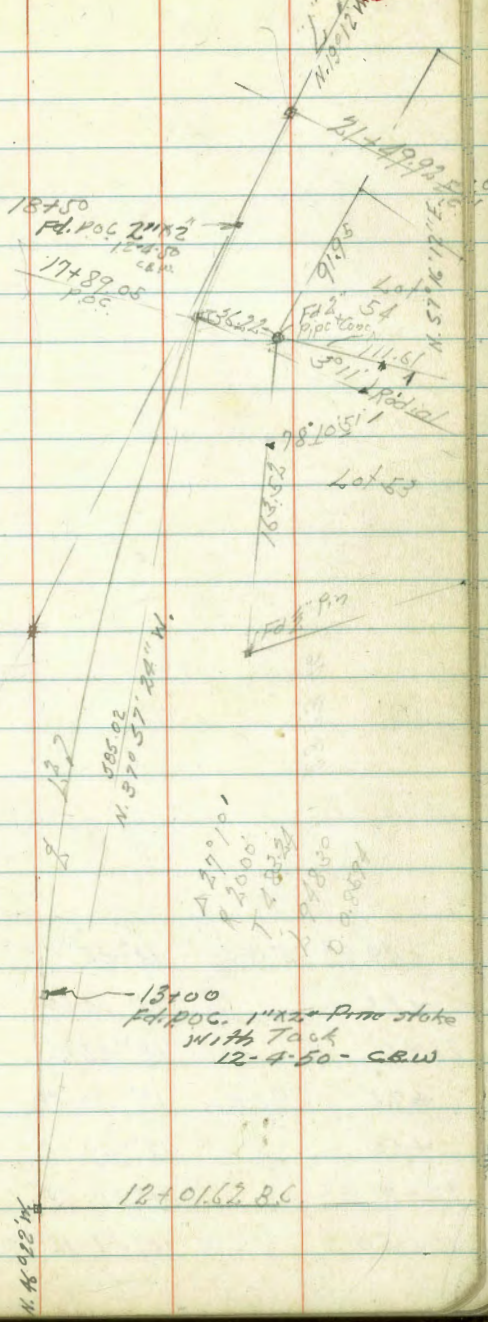

L 2"

2323.46'

+49.92	E.C.	13° 35'
+25		13° 13.55'
21+0		12° 52.06'
+75	P.O.C.	12° 30.58'
+50		12° 09.10'
20+0		11° 26.13'
19+50		10° 43 16'

March 14-47
S. Simon
McCa
Maddel
Allen

Cross Section L² Line
Proposed Throughway West of N 64+55 ft.
El Cajon Blvd. North

Note:- Rt + Lt. + = Above Σ - = Below Σ

+44.76	B.C. Lt.				
270					401.4 +0.4 54
+50					
170					
+50					
0+20.16	P.C.C.				
B.M.	5.08	408.85		403.77	S.E. BP El Cajon & 64+55 ft

Δ1 = M

401.7	403.1	401.1	400.9	400.1	400.3 Δ		400.7	400.3	401.3	401.6
+1.4 50	+2.8 24	+0.8 19	+0.6 11	-0.3 9	8.52 07406		+0.4 13	0.0 27	+1.0 31	+1.3 38
402.0	402.4	401.5	401.4	400.6	401.0		401.2	400.7	401.8	401.8
+1.0 36	+1.4 23	+0.5 20	+0.4 12	-0.4 10	7.8		+0.6 15	-0.3 27	+0.8 30	+0.8 37
401.4	402.2	402.5	401.4	401.7			401.9	401.3	402.2	402.5
-0.3 50	+0.5 34	+0.8 12	-0.3 9	7.1			+0.2 14	-0.4 26	+0.5 29	+0.8 38
401.5	402.2	402.8	402.1	402.2			402.5	402.4	404.1	
-0.2 58	0.0 36	+0.6 13	-0.1 11	6.6			+0.2 12	+0.3 28	+1.9 40	
	402.3	402.7	402.1	402.5			402.9	403.3	404.3	
	-0.2 53	+0.2 14	-0.4 11	6.3			+0.4 14	+0.8 31	+1.8 40	

629
07406

408.85

W.H.C. 10/1/59
3 B.C. 10/1/59

						Lt.		Ct.		Rt.	
						370.0		374.1	380.9	394.0	397.7	398.0	397.4
						-3.0 86		-1.9 67	-13.1 65	1.6	+3.7 16	+1.0 45	+3.4 56
4+05					377.1	371.2	374.5	380.1	385.4	388.3	397.8	397.6	398.1
					-1.2 94	-17.1 67	-13.8 47	-8.2 30	-2.9 7	10.3	+9.5 16	+9.3 35	+9.8 50
TP	2.10	398.61	12.34	396.51					398.61				
4+75								382.5	378.0	396.6	398.8	398.4	398.6	398.3
								-14.1 79	-18.6 38	12.3	+2.2 7	+1.8 18	+2.0 40	+1.7 55
4+50						388.9	388.3	390.2	398.9	399.2	398.5	398.9	398.6	
						-10.3 74	-10.9 53	-9.0 25	-0.3 7	9.7	-0.7 9	-0.3 30	-0.6 50	
4+25							395.2	396.0	399.5	399.3	398.9	399.4	399.1	399.8
							-1.1 54	-3.3 25	+0.2 12	9.6	-0.4 2	+0.1 20	-0.2 38	+0.5 42
4+0						397.3	401.0	400.2	400.1	399.4	399.6	400.3	399.5	400.6	
						-2.3 60	+1.4 17	+0.6 15	+0.5 7	-0.2 4	9.3	+0.7 16	-0.1 32	+1.0 40	
		408.85							408.85						

						Lt		℄		Rt		
6+08					358.6 -5.7 / 88	366.2 +1.9 / 58	367.6 +3.3 / 43	367.0 +2.7 / 12	364.3 9.4	371.9 +7.6 / 23	381.2 +16.9 / 49	387.7 +23.4 / 76
TP	0.25	373.71	12.90	373.46					373.71			
+75 x						366.1 -12.6 / 76	373.3 -6.4 / 50	379.4 -0.3 / 22	379.7 6.7	376.5 -3.2 / 23	376.0 -3.7 / 40	387.5 +7.8 / 64
TP	0.40	386.36	12.65	385.96					386.36			
+50						366.4 -19.6 / 83	376.2 -9.8 / 49	383.0 -3.0 / 26	386.0 12.6	387.5 +1.5 / 25	387.4 +1.4 / 60	
+25						361.7 -30.1 / 97	376.3 -15.5 / 60	381.9 -9.9 / 39	391.8 6.8	394.1 +2.3 / 15	394.5 +2.7 / 33	396.3 +4.5 / 50
5+0					363.7 -32.5 / 90	370.8 -25.4 / 67	383.2 -13.0 / 37	395.4 -0.8 / 7	396.2 2.4	396.6 +0.4 / 25	397.4 +1.2 / 60	
4+50					368.4 -28.5 / 95	368.5 -28.4 / 79	384.5 -12.4 / 33	396.1 -0.8 / 63	396.9 1.7	397.7 +0.8 / 30	397.7 +0.8 / 68	
		398.61							398.61			

Station						Lt.			℄		Rt.		
					341.7	338.2	344.6	350.1	357.6	365.5	375.2	378.7	
9+0					-15.9 / 116	-19.4 / 81 = Bottom Wash	-15.0 / 46	-7.5 / 25	1.0	+7.9 / 27	+17.6 / 58	+21.1 / 91	
TP	0.32	361.62	12.41	361.30					361.62				
					343.2	339.9	346.0	353.4	360.4	368.3	376.4	382.9	
+50					-17.2 / 101	-20.5 / 75 = Bottom Wash	-14.4 / 48	-7.0 / 25	13.3	+7.9 / 29	+16.0 / 63	+23.5 / 84	
					344.3	340.7	346.5	353.2	359.5	367.5	376.4	383.9	
8+0					-15.2 / 102	-18.8 / 74 = Bottom Wash	-13.0 / 50	-1.3 / 25	14.2	+8.0 / 21	+16.9 / 45	+24.4 / 85	
					343.2	347.2	348.4	352.5	358.8	368.6	376.8	384.3	
+50					-15.6 / 82 = Bottom Wash	-11.6 / 66	-10.4 / 48	-6.3 / 23	14.9	+9.8 / 29	+18.0 / 58	+25.5 / 87	
						349.2	352.0	357.7	361.5	366.4	373.4	380.6	393.4
7+0						-12.5 / 81	-9.5 / 44	-3.8 / 15	13.2	+4.9 / 21	+11.9 / 46	+19.1 / 67 = Top of Fill	+31.9 / 87 = Top Fill
						352.9	354.8	358.2	363.3	371.1	381.3	389.1	
6+50						-10.4 / 89	-8.5 / 59	-5.1 / 23	10.4	+7.8 / 25	+18.0 / 54	+25.8 / 76	

370.71

370.71

Station	B.S.	H.I.	F.S.	Elev.	Lt. ← ℄ → Rt. (elevation, rod difference / distance)
+50					331.7 (+2.8 / 105); 329.9 (+1.0 / 75); 325.6 (-3.3 / 70 = Bottom Wash); 329.8 (+0.9 / 64); 331.0 (+2.1 / 50); 330.1 (+1.2 / 25); ℄ 328.9 (8.7); 329.5 (+0.6 / 26); 330.6 (+1.7 / 53); 328.6 (-0.3 / 198 = Bottom Wash to East)
11+0					333.1 (+1.1 / 98); 326.8 (-5.2 / 80 = Bottom Wash); 331.7 (-0.3 / 68); 332.8 (+0.8 / 50); 332.8 (+0.8 / 25); ℄ 332.0 (5.5); 331.2 (-0.8 / 25); 332.0 (0.0 / 55); 333.0 (+1.0 / 95)
TP	0.27	337.55	12.93	337.28	337.55
+50					333.7 (-4.8 / 102); 330.9 (-7.6 / 80 = Bottom Wash); 334.6 (-3.9 / 50); 336.0 (-2.5 / 25); ℄ 338.5 (11.7); 339.3 (+0.8 / 26); 337.3 (-1.2 / 57); 336.1 (-2.4 / 100)
10+0					336.0 (-8.4 / 101); 333.5 (-10.9 / 75 = Bottom Wash); 337.6 (-6.8 / 50); 340.6 (-3.8 / 25); ℄ 344.4 (5.8); 349.4 (+5.0 / 24); 355.0 (+10.6 / 56); 350.0 (+5.6 / 88)
TP	1.13	350.21	12.54	349.08	350.21
+60					337.9 (-12.1 / 104); 335.4 (-14.6 / 81 = Bottom Wash); 340.5 (-9.5 / 49); 344.6 (-5.4 / 25); ℄ 350.0 (11.6); 357.3 (+7.3 / 23); 364.5 (+14.5 / 50); 366.5 (+16.5 / 83)
9+30					339.6 (-15.2 / 100); 336.6 (-18.2 / 80 = Bottom Wash); 342.5 (-12.3 / 49); 347.3 (-7.5 / 25); ℄ 354.8 (6.8); 361.2 (+6.4 / 21); 367.8 (+13.0 / 48); 374.2 (+19.4 / 85); [illegible] (7.8 / 23)
		361.62			361.62

Lt. ℄ Rt.

+75
-8.6/97 325.1; -11.0/76 322.7; -13.9/63 319.8; -8.8/53 324.9; -4.2/37 329.5; -2.1/11 331.6; 3.9 333.7; +5.3/23 339.0; +14.2/51 347.9; +21.9/79 355.6; +27.0/1.06 360.7

+50
-8.0/95 325.7; -8.0/73 325.7; -9.8/58 323.9; -12.2/52 321.5; -9.0/46 324.7; -5.5/30 328.2; -1.0/12 332.7; 3.9 333.7; +5.9/25 339.6; +14.4/55 348.1; +19.2/91 352.9

+25
-5.1/90 326.9; -7.4/55 324.6; -10.1/51 321.9 (Bottom Wash); -7.3/45 324.7; -6.2/25 325.8; 5.6 332.0; +5.0/25 337.0; +8.5/35 340.5; +16.2/81 348.2; +18.9/104 350.9

12+01.62 B.C. Rt
-0.8/100 328.4; -4.0/66 325.2 (Bottom Wash South); -3.6/34 325.6; -6.1/28 323.1 (Bottom Wash); -3.6/20 325.6; 8.34 on Hub 329.2; +5.9/25 335.1; +10.9/45 340.1; +14.7/93 343.9

+90
+3.9/101 328.9; +0.3/73 325.3 (Bottom Wash); +2.9/64 327.9; +2.5/44 327.5; +1.5/17 326.5; -0.8/16 324.2; 12.6 325.0 (Bottom Wash); +0.3/8 325.3; +4.9/12 329.9; +11.4/43 336.4; +19.8/100 344.8

+83 For Profile 10.0

11+77
-1.4/87 326.4; -3.6/83 325.2 (Bottom Wash); -1.4/80 326.4; +0.8/66 328.6; +0.6/50 328.4; +0.5/30 328.3; -1.4/25 326.4; 9.8 327.8; +0.1/6 327.9; -1.5/20 326.3 (Bottom Wash); -1.3/50 326.5; +2.0/62 329.8; +9.8/93 337.6

337.55

337.55

							Lt			℄		Rt.	
+25						314.6	316.8	319.2	320.7	321.9	329.0	340.3	357.4
						-7.3	-5.1	-2.7	-1.2	9.3	+7.1	+18.4	+35.5
						73 = Bottom Wash	50	25	3		26	59	100
14+0						316.6	317.1	321.1	322.9	325.3	333.8	351.8	364.4
						-8.7	-8.2	-4.2	-2.4	5.9	+8.5	+26.5	+39.1
						72	55	28	10		27	70	100
TP	3.49	331.18	9.86	327.69						331.18			
+75						316.2	320.2	323.1	325.3	327.7	336.0	347.1	366.9
						-11.5	-7.5	-4.6	-2.4	9.9	+8.3	+19.4	+39.2
						86 = Bottom Wash	68	30	14		25	52	91
+50						317.9	321.6	325.1	327.4	329.3	335.5	353.8	367.8
						-11.4	-7.7	-4.2	-1.9	8.3	+6.2	+24.5	+38.5
						91	75	31	19		29	66	93
+25						317.7	322.9	326.8	328.3	333.1	337.6	342.6	363.7
						-15.4	-10.2	-7.3	-4.8	4.5	+4.5	+9.5	+30.6
						87 = Bottom Wash	74	42	21		25	50	97
13+0					324.4	323.2	319.3	323.5	327.1	328.9	334.3	340.2	350.4	359.7
					-9.9	-11.1	-15.0	-10.8	-7.2	-5.4	3.3	+5.9	+16.1	+25.4
					104	84	79	67	42	23		25	68	100
		337.55								337.55			

					Lt.		℄		Rt.					
					308.4	309.8	309.6	310.7	312.3	312.6	317.1	325.2	331.8	341.0
+50					-4.2/72	-2.8/68	-3.0/40	-1.9/21	-0.3/4	8.4	+4.5/22	+12.6/59	+19.2/89	+28.4/126
TP	2.59	321.02	12.75	318.43	Bottom Hoss				321.02					
					309.8	311.0	312.2	314.2	316.2	316.9	320.7	330.0	340.3	
16+0					-7.1/76	-5.9/68	-4.7/55	-2.7/25	-0.7/7	14.3	+3.8/39	+13.1/77	+23.4/113	
					311.9	314.3	311.4	313.4	316.1	318.1	321.3	327.9	341.9	
+50					-6.2/77	-3.8/72	-6.7/57	-4.7/40	-2.0/17	13.1	+5.2/22	+9.8/53	+23.8/97	
					313.2	315.7	314.2	313.0	316.5	316.5	317.7	322.9	331.6	339.5
15+0					-3.3/70 = Bottom Hoss	-0.8/61	-2.3/37	-3.5/29	0.0/13	14.7	+1.2/4	+6.4/29	+15.1/64	+23.0/106
						313.3	315.7	314.0	317.4	317.4	318.9	322.3	329.2	343.7
+75						-4.1/76	-1.7/70	-3.4/33	0.0/8	13.8	+1.5/8	+4.9/33	+11.8/59	+26.3/102
					313.6	316.7	316.1	316.8	318.7	319.2	322.2	326.6	343.4	351.3
14+50					-5.6/75 Bottom Hoss	-2.5/70	-3.1/60	-2.4/25	-0.5/10	12.0	+3.0/10	+7.4/31	+24.2/85	+32.1/114

331.18

Station					Lt		℄	Rt		
				302.9	302.8	303.2	304.3	306.3	314.5	324.8	338.6	354.4
+75				-11.6 / 104	-11.7 / 78	-11.3 / 54	-10.2 / 30	-8.2 / 27	6.5	+10.3 / 26	+24.1 / 53	+39.9 / 84
				303.5	303.8	305.7	307.8	308.8	316.4	325.7	341.5	358.9
+50				-12.9 / 98	-12.6 / 84	-10.7 / 54	-8.6 / 29	-7.6 / 28	4.6	+9.3 / 22	+25.1 / 54	+43.5 / 89
BM	8.73	312.29	002 Hub 18+00 L 312.25 1738.60	302.8	304.9	306.7	309.8	312.1	318.6	325.5	335.6	354.7
18+0				-15.8 / 89 (Bottom Moss)	-13.7 / 83	-11.9 / 53	-8.8 / 26	-6.5 / 23	2.4	+6.9 / 22	+17.0 / 49	+36.1 / 89
					304.5	307.2	309.5	311.9	315.7	322.1	333.7	350.4
+50					-11.2 / 89	-8.5 / 52	-6.5 / 26	-3.8 / 23	5.3	+6.4 / 25	+18.0 / 58	+34.7 / 94
						307.2	307.2	308.1	312.8	317.9	328.0	349.5
+25						-5.6 / 82	-5.6 / 61	-4.7 / 21	8.2	+5.1 / 21	+15.2 / 54	+31.7 / 95
					307.0	308.2	308.0	308.0	309.1	317.0	328.5	341.7
17+0					-2.1 / 86 (Bottom Moss)	-0.9 / 63	-1.1 / 38	-1.1 / 13	11.9	+7.9 / 24	+19.4 / 68	+32.6 / 108

321.02 321.02

1940	+25	+50	2040	+50	+25
		302.2	301.3		
		300.1	298.9	299.8	
	301.4		297.9		299.3
302.7	299.6	299.1	298.9	297.6	297.0
302.4	301.0	300.9	299.3	298.7	299.5
302.5	301.4	301.0	301.3	301.0	301.0
303.7	302.2	308.2	305.9	308.1	307.7
309.1	309.0	313.7	316.1	316.6	316.9
319.5	319.6	321.3	327.8	326.6	328.2
334.2	339.5	334.5	340.9	342.6	344.5
356.4	358.0	348.6	355.8	356.1	359.1

2 RY

					296.2	295.2	297.8	298.2	300.2	305.3	313.9	324.8	337.7	355.9
21+0					-17.7 98	-18.7 78 = Bottom Wall	-16.1 71	-15.7 54	-13.7 52	-8.6 24	7.1	+10.9 23	+23.8 48	+42.0 85

321.02 321.02

Indexed
C.S.A.

X-Sect. 20' Alley in Block 11
Kimballs sub. - Map # 56 - Tie sheet # 130
1529
W.O. 31335

9-5-47

Osborne
Hardin
~~Smith~~
Worrell

Levels - Next Page

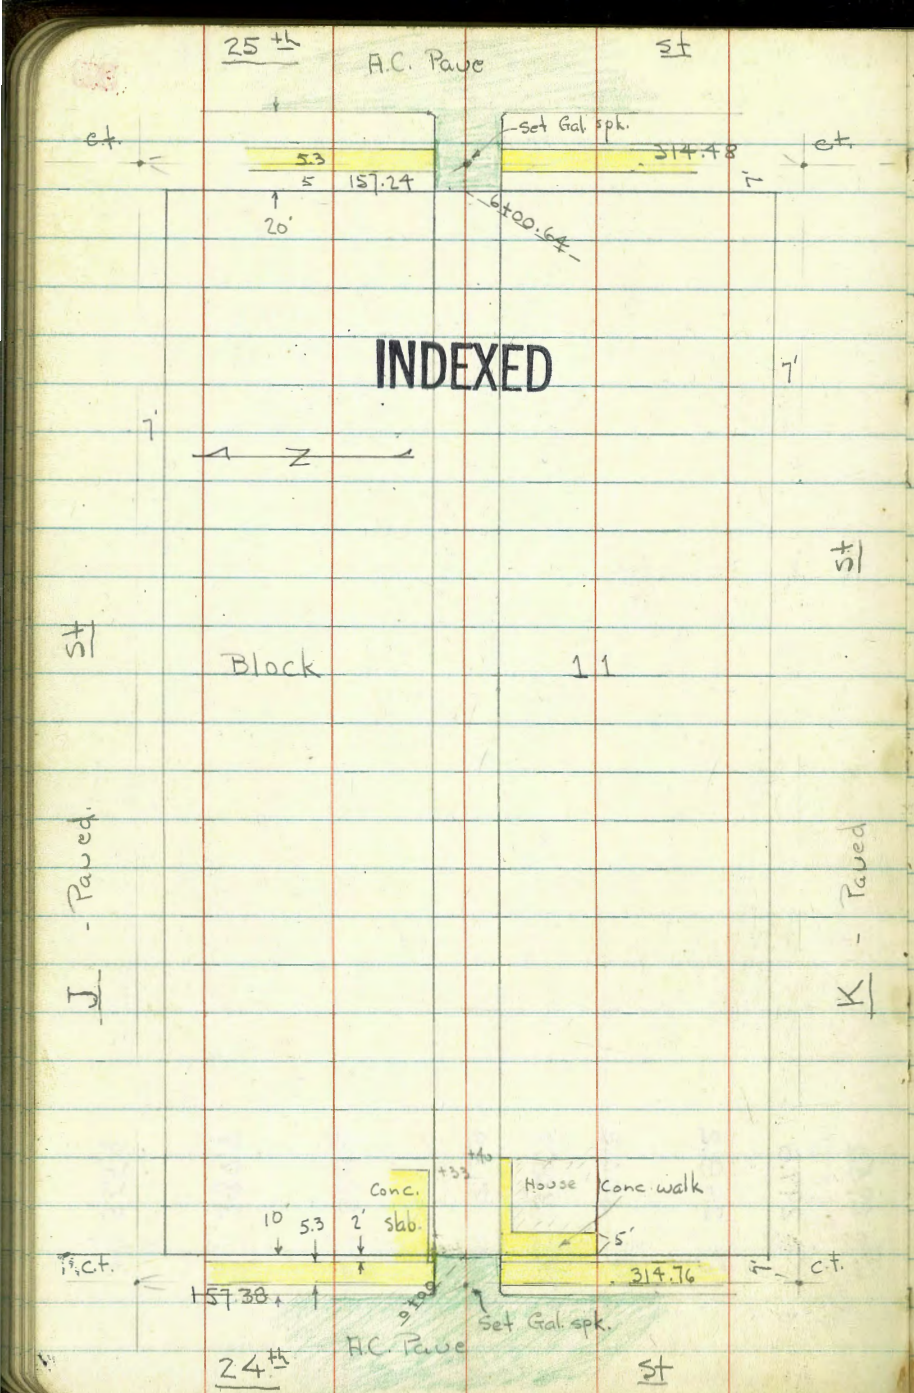

X-Sect. 20' Alley – Block 11 — Lt. = N. — ℄ — Rt. = S.

0+50 – 10' Rt. = end Picket fence

88.2 2.9/10 · 86.6 4.5/5 · 86.4 4.7 · 86.3 4.8/7 · 86.3 4.8/10 · 84.8 6.3/11 · 83.5 7.6/20

0+40 – 10' Rt. = end 3' Conc. walk

85.81 5.26 Top-Cor.

0+39 – 12.9 Lt. = ℄ Sing. Gar. – Dirt floor

87.8 3.3 12.9 floor

0+33 – 11.3 Lt. = end – cor. Conc. slab.

89.00 2.07 11.3 Top Cor.

0+30 – 9.9 Lt. = end Conc. wall

88.08 2.99/9.9 Top-endwall · 87.4 3.7/9.9 Dirt · 86.5 4.6/7 · 86.3 4.8 · 86.3 4.8/6 · 86.6 4.5/10 Dirt · 85.88 5.19/10 walk

0+23 – 9' Lt. = Nly. Tel. pole # 309529H

0+22 – 7.3 Lt. = end. Sly Hedge

0+10

88.33 2.74/11.6 Top Conc. slab. · 87.71 3.36/9.9 Top wall · 87.4 3.7/9.9 Dirt. · 86.3 4.8/7 · 86.2 4.9 · 86.3 4.8/6 · 86.4 4.7/10 Dirt · 85.91 5.16/10 on walk

along House

0+05 – 10' Rt. – Beg. Picket fence + 3' Conc. walk

86.01 5.06/10 edge walk · 85.94 5.13/13 along House-Cor. · 86.91 4.16/13 floor House

0+00 – 9.9 Lt. = Beg. 8" Conc. wall – Joins Top of cb.

0+00 – 10' Rt. = Beg. Conc. slab. + walk along House

0+00 = E.L. 24th = edge F.C. Pave

87.11 3.96/9.9 Top · 86.59 4.48/9.9 gut · 86.04 5.03 · 85.87 5.20/10 gut. · 85.97 5.10/10 Top

0-02 – 6.5 Lt. = Beg. Sly. 5' Hedge – 8' High

11.8 Lt. = Beg. Slly. Conc. slab.

87.27 3.80 11.8 = Top Conc.

0-10 = E. cb. 24th

83.45 7.62/50 gut. · 85.05 6.02/25 Top · 84.45 6.62/25 gut. · 85.76 5.31/10 Top 2' Rad. · 85.27 5.80/10 gut. · 85.99 5.08 · 86.59 4.48/10 gut. · 86.95 4.12/10 Top 2' Rad. · 87.65 3.42/25 gut in Dr. · 89.32 1.75/50

B.M. 11.64 91.07 79.43 N.E. B.P. 24th + K

91.07

1+94 - 11.5 Lt. = ℄ old Sing. Gar. used as shed - Dirt floor
1+90 - 9.7 Lt. = end fence

1+50 - 8.9 Lt. = Nly. Tel pole # 42 55 92 H
1+50 - 10.2 Lt. = Beg. board fence
1+49 - 10.4' Rt. = Beg. board fence
1+49 - 10.8 Rt. = N.E. Cor. Gar. - Conc. floor
1+48 - 12.9 Lt. = S.E. Cor. Hpt. House

1+28 - 11.4 Rt. = N.W. Cor. - Gar. & shop - Conc. floor
1+28 - 11.4 Rt. = end Conc. Slab.

T.P.	3.18	91.78	2.47	88.60	Nail in Pole

1+25
1+17 - 11' Rt. = Beg. - Cor Conc. slab.
1+01 - 10.8 Rt. = Beg. board fence
1+00 - 14' Lt. = S.W. Cor. Hpt House - Conc. floor.

0+96 - 10.9 Rt. = ℄ 8.3 chicken shed. - Dirt floor
0+99 - 15.6 Lt. = S.E. Cor. Gar.
0+86 - 9.6 Rt. = Sly P pole # A 2412
0+72 - 9.3 Rt. = ℄ Dead man for Guy to pole above

0+67 - 15.2 Lt. = S.W. Cor. - 3 car Gar. Conc. floor

	Lt.	℄	Rt.
88.6	3.2 / 11.5 floor		
89.0	2.8 / 15	88.2 3.6 / 10	86.9 4.9 / 4
86.6		5.2	86.6 5.2 / 10
86.0			5.8 / 15
88.94	2.84 / 12.9 floor		
86.18			5.60 / 10.8 floor
85.96			5.82 / 11.4 Top Conc.
85.72			6.06 / 11.4 floor
91.78			
88.13	2.8 / 10	86.8 4.3 / 3	86.5 4.6
86.1			5.0 / 10
85.94			5.13 / 11.4 Top conc.
84.13			6.8 / 25
86.13			4.94 / 11 Top conc.
89.04	2.03 / 14 floor	88.6 2.5 / 14 ground.	87.9 3.2 / 10
86.8		4.3 / 5	86.5 4.6
86.6			4.5 / 10
85.7			5.4 / 11
84.4			6.7 / 25
85.9			5.2 / 10.9 floor.
88.80	2.27 / 15.6 floor.		
88.16	2.31 / 15.2 floor		
91.07			

3+25

T.P.	7.00	93.31	5.47	86.31

3+00 - 97 Rt. = fence

2+99 - 8.2 Lt. = S.E. Cor. shed.
2+84 = 8.8' Lt. = S.W. Cor. old shed. - Dirt floor
2+82 - 8.7 Lt. = Nly. Tel. pole D 6592 T
2+81 - 9.3' Lt. = end fence

2+75 - 9.9' Rt. = Nly. 8" Conc. Ret. wall
2+64 - 9.6 Lt. = end board + Beg. wire fence

2+50
2+19 - 9.6 Lt. = end wire fence - beg. board fence
2+18 - 10' Rt. = Sly. P. pole # A 2432

Gar. foundation - No building.
2+09 - 10.1 Lt. = Sly. Conc. apron to old Conc.
2+06 - 10.6 Rt. = ang. in fence
2+00 - 14.2 Rt. = Nly. 8" old found. wall - Conc.
1+99.5 - 9.7 Lt. = Beg. wire fence
1+98 - 11.4 Rt. = end board + Beg. picket fence

	Lt.		℄		Rt.	
87.8	87.1	86.6	86.1	85.5	84.7	83.8
5.5	6.2	6.7	7.2	7.8	8.6	9.5
20	10	5		10	11	20

93.31

87.8	87.1	86.6	86.1	85.3	84.8	83.4
4.0	4.7	5.2	5.7	6.5	7.0	8.4
15	10	8		10	11	20

87.4
4.4
88
floor

89.2	87.4	86.7	86.0	85.6	86.45	85.22	86.5	84.3
2.6	4.4	5.6	5.8	6.2	5.33	6.6	5.3	7.5
20	10	4		9	9.8 Top wall + ground to W	9.8 ground to E	20 TO W.	20 To E

89.9	88.6	86.3	86.1	86.3	86.5
1.9	3.2	5.5	5.7	5.5	5.3
15	10	4		10	20

88.78
3.00
13.6
floor

88.22
3.56
10.1
apron

89.2	88.1	87.0	86.6	86.0	86.56
2.4	3.7	4.8	5.2	5.8	5.22
15	10	4		10	14.2 Top Conc. + ground

91.78

4+04 - 10.3 Rt. = Beg. Conc. apron to Doub. Gar. - Conc. floor

4+00

3+99.5 - 8.7 Lt. = Beg. - Cor. - 6" Ret. wall - Conc.
3+99 - 10' Rt. = ℄ 4' Conc. walk
3+97 - 12.1 Rt. = N.E. Cor. Bldg.
3+96 - 8.6 Rt. = end fence

3+75
along House
3+70 - 9.1 Rt. = Beg. Rough board fence around flowers
3+69 - 9.3 Lt. = S.E. Cor. Gar.
3+52 - 9.3 Lt. = S.W. Cor. Sing. Gar. opens E. - Dirt floor
3+51 = ℄ Sewer M.H. 7.29 El. 86.02 on Rim.
3+50 - 8.8 Lt. = S.E. Cor. Gar

3+48 - 11.9 Rt. = N.W. Cor. one story Apts. - wood found.
3+48 - 9.9 Rt. = end fence

3+47 - 9.5 Rt. = Sly P. pole #
3+33 - 8.7 Lt. = S.W. Cor. Doub. Gar. opens W.
- Dirt floor

Lt.		℄		Rt.	
				87.13	86.41
				6.18	6.89
				10.3	19.9 Floor Gar.
90.4	90.3	90.71	88.33	87.4	87.1	86.6	86.83	85.46
2.9	3.0	2.60	5.0	5.9	6.2	6.7	6.48	7.85
15	10	8.7 Top wall	8.7 ground	4		10	10 on Conc.	20 on walk
90.71		87.76					87.81	87.46
2.60		5.55					5.50	5.85
8.7		8.7					10	12.1
Top wall		Bottom of footing					walk	floor
	88.11	87.6	86.8	86.4	86.5			
	5.1	5.7	6.5	6.9	6.8			
	20	10	5		10			
88.4								
4.9								
9.3 floor								
88.3	88.3	87.5	86.4	86.0	85.6		85.6	
5.0	5.0	5.8	6.9	7.3	7.7		7.7	
15	10	9	6		10		11.9 along house	87.39
								5.92
								11.9
								floor
87.9								
5.4								
8.7								

93.31

back of fence

4+72 = 9.7 Rt = ℄ 3.5' Conc. wall . 5" wide - along Long.

4+70 = 7.4 Rt. = end Nly. Conc. Slab.

4+66 - 8.9 Lt. = end Conc. apron to Gar.

4+58 - 7.4 Rt. = Nly. of 3' Conc. Slab = apron to Dirt Drive.

4+50 - 9.9 Rt. = end wire + beg picket fence

4+38 - 8.9 Lt. = Beg. Conc. apron to 3 car Gar. - Conc. floor

4+35 - 8.7 Lt. = end Conc. apron

4+25

4+23 - 9.8 Rt. = Beg wire fence

4+22 - 10.3 Rt. = end. Conc. apron + Conc. floor

4+21.5 - 8.4 Lt. = Beg. Conc. apron to Sing. Gar. -

4+21.5 - 8.8 Lt. - end Conc. wall

4+13 - 8.7 Lt. = Nly. Tel. pole # 415373 H

Lt.	℄	Rt
		87.63 5.68 Top wall
		87.70 5.61 7.4 Conc.
		87.68 5.63 10.4 Conc.
89.91 3.40 13.1 floor Gar.	89.06 4.25 8.9 apron - Cor.	87.79 5.52 7.4 Conc.
		87.80 5.51 10.4 Conc.
89.31 4.00 10 on Conc.	89.09 4.22 8.9 edge apron	88.1 5.2
		87.7 5.6 10
		87.0 6.3 11
		85.9 7.4 20
89.94 3.37 13.1 floor	89.01 4.30 8.9 apron	
89.95 3.36 12.6 floor	89.27 4.04 9.7 apron	
89.45 3.86 10 on Conc.	89.23 4.08 8.4 edge apron	88.0 5.3
		87.7 5.6 10
		86.5 6.8 20
		87.79 5.52 10.3 apron
		86.45 6.86 19.9 floor.
89.86 3.45 12.3 = floor Gar.	89.30 4.01 8.4 apron	
90.63 2.68 8.8 Top wall	88.53 4.77 8.8 Bottom of footing	

93.31

5+59 - 9.9 Rt. = N.W. Cor. House - Conc. found.

T.P.	5.01	92.90	5.42	87.89

5+54 - 8.3 Lt. = Beg. Lath fence

5+50

5+49 - 8.9 Lt. = ℄ Guy - Deadman
5+49 - 16' Rt. = N.E. Cor. wing.
5+39 - 9.9 Rt. = N.W. Cor. wing to House - wood found.
5+39 - 10.2 Rt. = end fence
5+35 - 8.9 Lt. = Nly. Tel. pole # D.6594T
5+25
5+14 - 8.2 Rt. = ℄ Guy - Deadman
5+11 - 13.1 Lt. = ℄ Doub. Gar. - Dirt floor.

5+00 - 16' Rt. end Picket fence & 10.2 Rt. = beg. board fence.
5+00 - 9' Rt. = Sly. P. pole # A 2486

Canvas - Board floor - rough (Behind fence)
4+80 - 9.5 Rt. = ℄ Sing. Gar. - frame Covered with

4+75

Lt.		℄		Rt.
				87.3 5.6 9.9 ground at House
		92.90		
88.0 4.5 15	88.6 4.7 10	88.0 5.3 7	87.9 5.4	87.8 5.5 6
87.9 6.4 10	86.5 6.8 15			
				87.2 6.1 9.9 ground
88.00 5.31 9.9 floor.				
	88.1 4.6 15	88.2 5.1 10	87.6 5.7	87.2 6.1 10
86.3 7.0 11	85.7 7.6 15			
88.1 4.6 13.1 floor.				
89.5 3.8 15	88.6 4.7 10	88.2 5.1 8	88.0 5.3	87.6 5.7 10
86.7 6.6 11	86.1 7.2 15			
				87.7 5.6 9.5 floor.
89.9 3.4 15	89.3 4.0 10	88.4 4.9 5	88.1 5.2	87.5 5.8 10
86.7 7.1 20				
		93.31		

check Starting B.M.			1.60	79.42	79.43
	10.02	81.02	9.56	71.00	
T.P.	0.27	80.56	12.61	80.29	

6+20 .64 = W. cb 25th

6+10 .64

6+00 .64 = W.L. 25th = edge HC. Pave

5+96 - 12.7 Lt. = S.E. Cor. House

5+92 - 9.8 Rt. = N.E. Cor. House

5+75

5+69 - 12.6 Lt. = S.W. Cor. House - Conc. found.

5+56 - 8.5 Lt. = end fence

Lt.	℄	Rt.
91.52	90.25	89.58
1.38	2.65	3.32
50	25	25
gut.	Top	gut.
		1' Rad.
89.19	88.47	87.69
3.71	4.43	5.21
10	10	
Top	gut.	
87.04	87.62	85.82
5.86	5.28	7.08
10	10	25
gut.	Top 1' Rad.	gut.
		86.48
		6.42
		25
		Top
		83.83
		9.02
		50
		gut.
89.54	88.83	87.79
3.36	4.07	5.11
10.1	10.1	
Top	gut.	
87.64	87.78	
5.26	5.12	
9.7	9.7	
gut.	Top	
89.40	88.97	87.97
3.50	3.93	4.93
10.1	10.1	
Top cb.	gut.	
87.86	87.95	
5.04	4.95	
9.8	9.8	
gut.	Top cb.	
90.53	89.30	
2.37	3.6	
12.7	12.7	
floor	ground.	
		87.7
		5.2
		9.8 = ground
		88.58
		4.32
		9.8
		floor.
88.6	88.0	87.9
4.4	4.9	5.0
10		6
		87.4
		5.5
		9.9
		along House
88.16		
4.3		
12.6		
ground.		
at House		

92.90

λ- Sect. 20' Alley in Block 281
Pacific Beach-

W.O. 25001

4-9-48
Osborne
Hardin
Worrell
Rorer

INDEXED

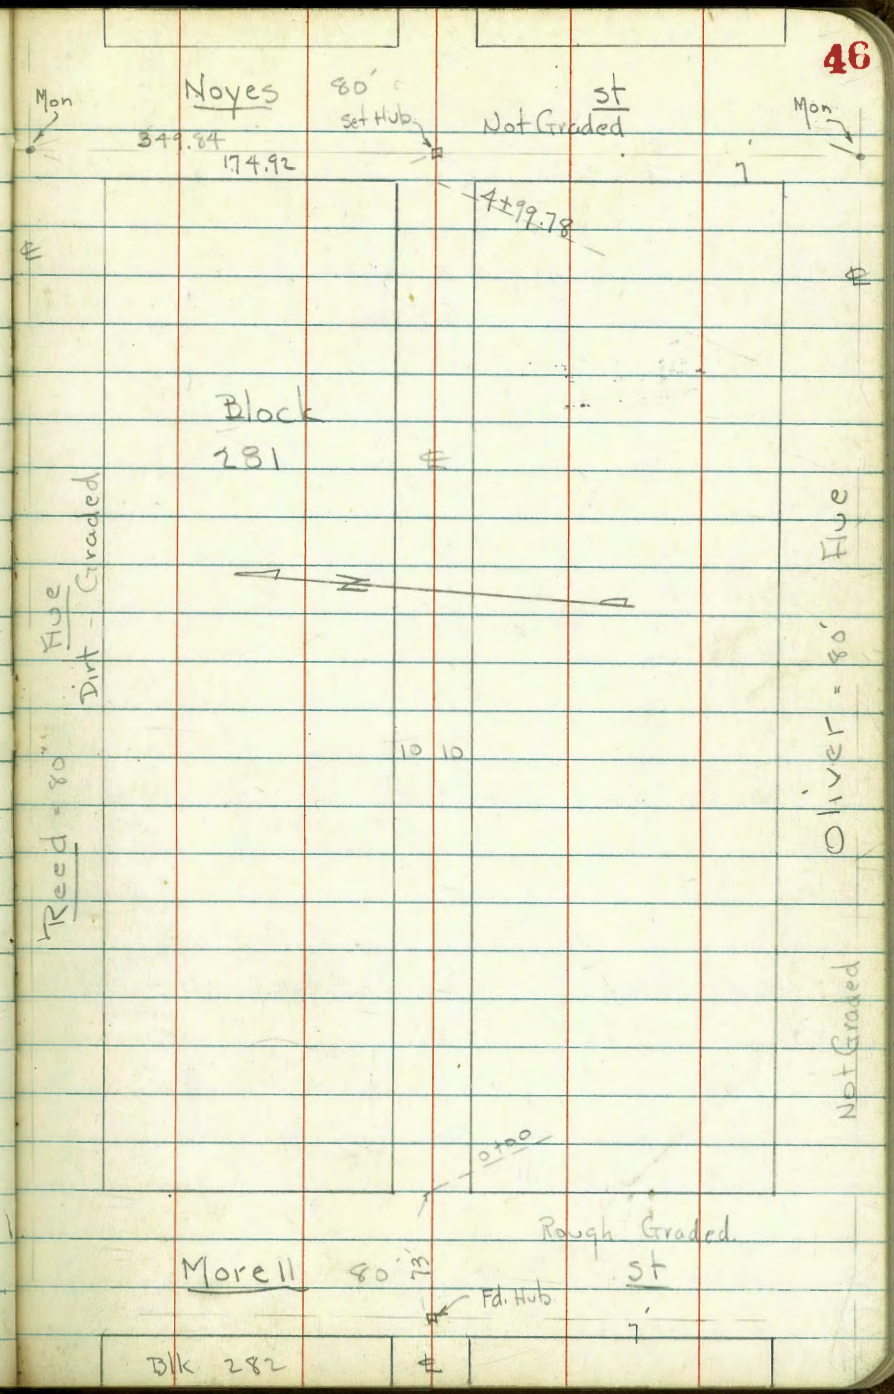

X-Sect 20' Alley in Blk 281

2+20

1+80

1+50

1+10

0+70

0+50 10' Lt. = end wall

0+40.5 - 10' Lt. = Beg. 4" Conc. Wall - fence on top

0+40

0+00 = F.L. Morrell

T.P. on W.T. Hub. + E Alley Blk 282 — 6.83 / 5.39 — 30.27 / 28.92 — 5.48 — 23.44 / 23.53 — S.W.T. Mon. Pac. B. Dr. + Morell

Lt			℄			Rt	
19.87			18.67			18.47	19.87
11.4	11.4	11.6	11.6	11.6	11.8	11.8	12.4
20	10		10		20		50
18.87	18.67	18.57	18.47		18.37		
11.4	11.6	11.7	11.8		11.9		
20	10		10		20		
19.07	18.87	18.87	18.87		18.57		
10.6	11.0	11.4	11.4		11.7		
20	10		10		20		
20.37	20.07	20.27	19.97		19.77	19.27	
9.9	10.2	10.0	10.3		10.5	11.0	
20	10		10		20	50	
22.97	23.07	22.87	22.57		22.37		
7.3	7.2	7.4	7.7		7.9		
20	10		10		20		
26.19	26.27	26.47	25.87		25.67	24.17	
4.08	4.06	4.08	4.4		4.6	6.1	
10	10	10	10		10	50	
Top	Top	ground					
26.21	25.87	25.47	24.87		24.57		
4.06	4.4	4.8	5.4		5.7		
10	10	10	10		20		
Top wall	ground						
27.47	26.47	26.17	25.47		25.07		
2.8	3.7	4.1	4.8		5.2		
50	20	10	10		20		
			26.37	24.97			
			4.9	5.3			
			10	10			
			ground				
			30.27				

check Starting B.M			2.68	23.51	23.53
T.P.	10.74	26.19	3.39	15.45	
20' E = W. cb. Noyes					
checked Elevs that are the same - New elev. shown					
4+99.78 = W.L. Noyes					
4+60					
4+20 - 32.2 Lt = New Bldg. under Const					
3+80					
3+65 - 31.8 Lt = ℄ New Court Bldg					
3+40					
3+00					
T.P.	1.49	18.84	12.92	17.35	
2+60					
2+50 = 0.4 Lt = ℄ Sewer M.H.			11.56	18.71	on Rim

		Lt				Rt.			
8.7	5.5	4.34	4.34	3.7 ~~4.04~~	3.6 ~~3.54~~	3.4 ~~3.24~~	3.3	3.7
100	50	14.5	14.5	14.8	15.3	15.6	50	100
		20	10		10	20		
8.1	5.34	4.94	4.8 ~~4.64~~	4.64	4.34	4.04	3.94	5.8
100	13.5	13.9	14.2	14.2	14.5	14.8	14.9	100
	50	20	10		10	20	50	
		5.84	6.44	7.24	7.44	7.44		
		13.0	12.4	11.6	11.4	11.4		
		20	10		10	20		
13.38	8.14	8.54	9.24	9.94	10.14	10.64		
5.46	10.7	10.3	9.6	8.9	8.7	8.2		
32.2	32.2	20	10		10	20		
Top Conc found	ground							
15.07	12.24	11.44	12.44	13.04	13.34	13.64		
3.77	6.6	7.4	6.4	5.8	5.5	5.2		
31.8	31.8	20	10		10	20		
floor	ground							
		15.34	15.74	15.84	15.84	15.94		
		3.5	3.1	3.0	3.0	2.9		
		20	10		10	20		
15.34		17.24	17.64	17.74	18.14	18.34		
3.5		1.6	1.2	1.1	0.7	0.5		
50		20	10		10	20		
				18.84				
		18.97	19.07	18.97	18.97	18.87		
		11.3	11.2	11.3	11.3	11.4		
		20	10		10	20		
				30.27				

X-16-49
Hendricks
Roberts
Greer
Rorer
WO#25001

INDEXED
W.K.
JUN 17 1949

X Section Alleys Block G
Riviera Villas

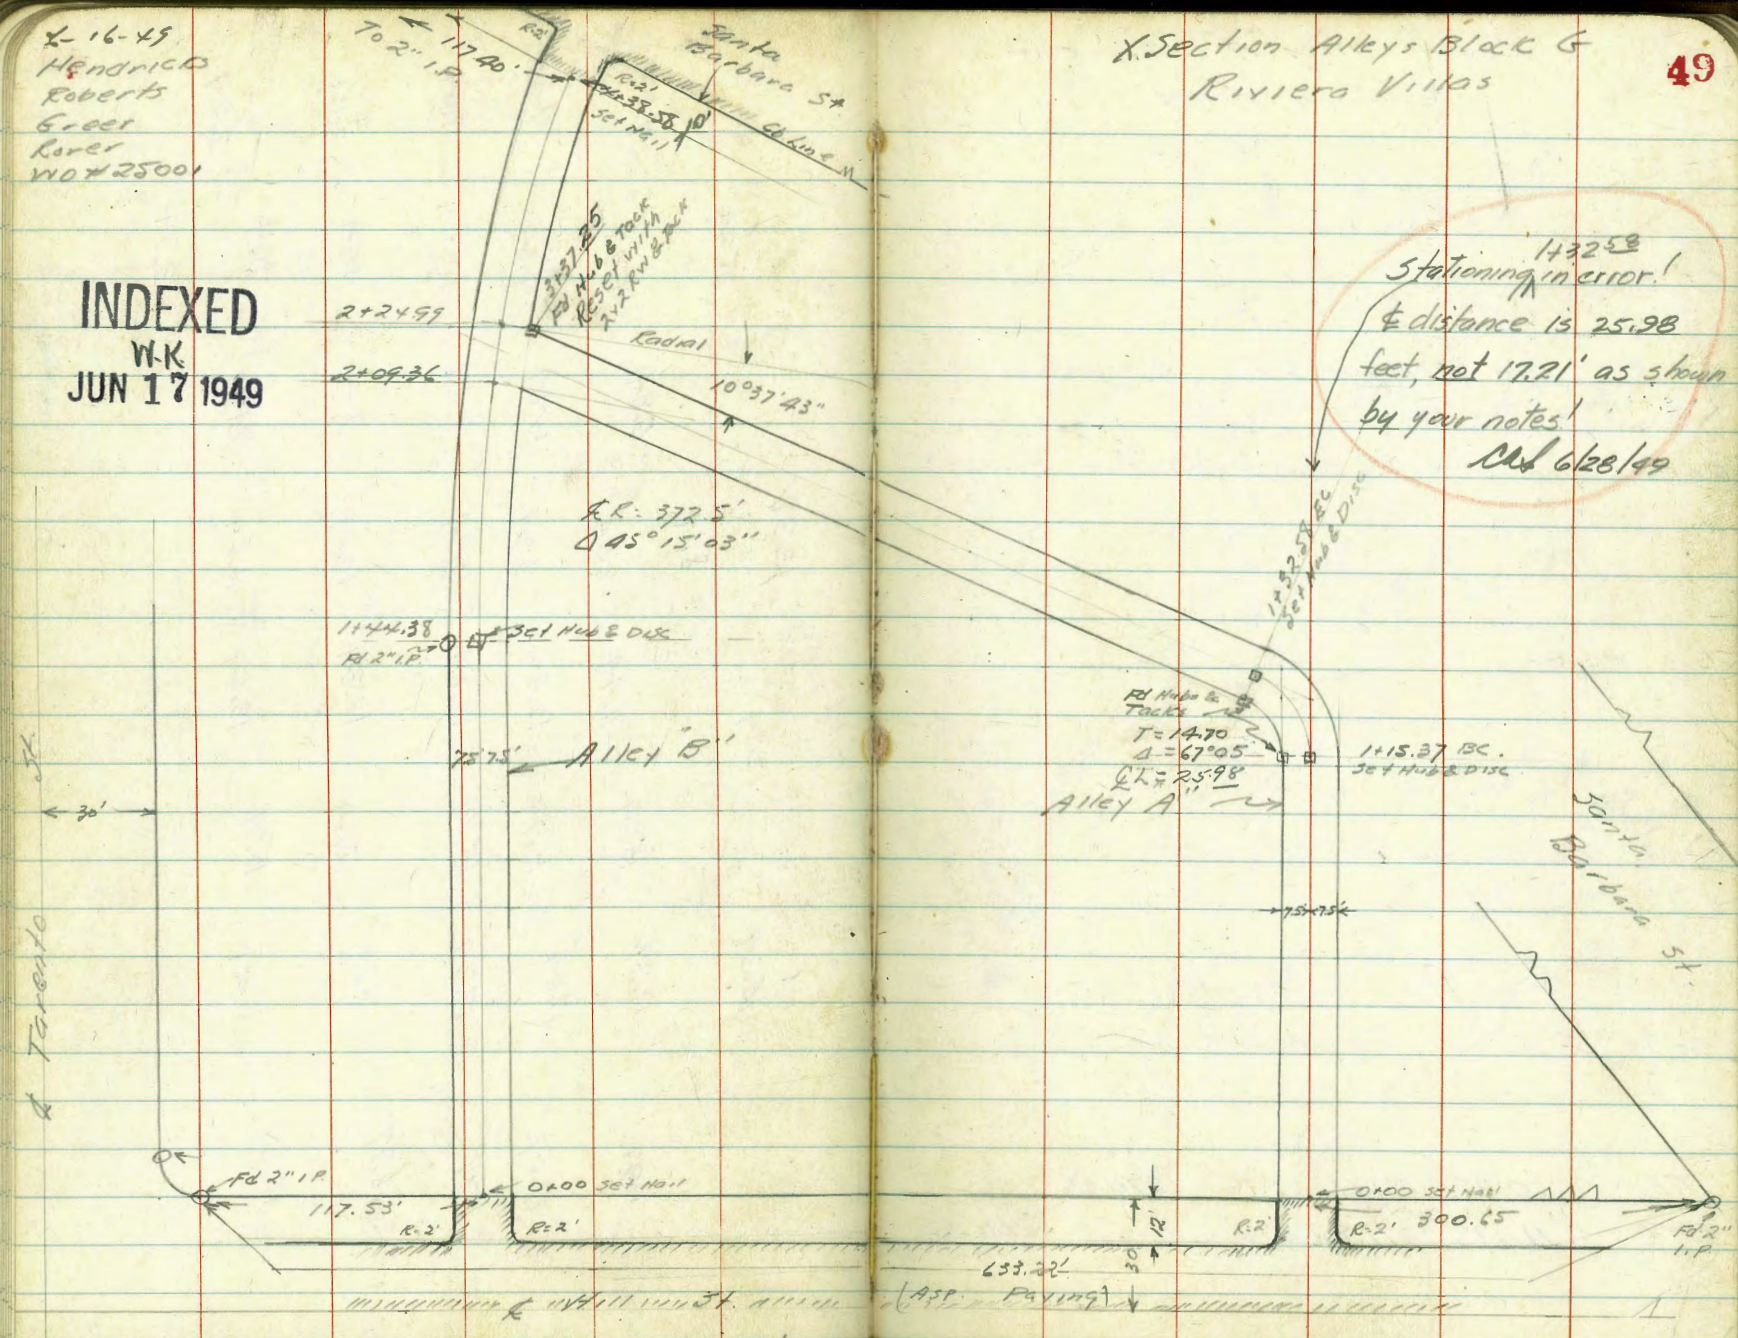

Stationing 1+32.58 in error!
℄ distance is 25.98 feet, not 17.21' as shown by your notes!
CAS 6/28/49

Levels Alley "A" Block G
Riviera Villas

0+10					
T.P.	7.70	282.60	6.71	274.90	
0+00 No. Line Hill (Edge Asph. Pav. End Cbs)					
0-10 BC Ret.					
0-12 No. Cb. Line Hill St.					
0-30 ℄ Hill St. Edge Asph. Paving					
T.P.	10.95	281.61	1.16	270.66	
BM	11.17	271.82			260.65

Reduced By Barrett 6-23-49

℄

277.7 276.6 275.9 275.6 274.5
4.9 6.0 6.7 7.0 8.1
20 7.5 7.5 20

℄ Nail 0+00 282.60

277.2 276.45 275.80 274.90 274.61 274.81 274.2
4.4 5.16 5.81 6.21 7.00 6.80 7.4
17 7.8 7.8 7.2 7.2 17
Cb. G G Cb.

276.16 275.48 274.30 274.62
5.45 6.13 7.31 6.99
9 9 7 7
Cb. G G Cb.

280.19 279.51 276.19 275.56 274.72 274.22 274.64 274.04 271.57 270.91
1.42 2.10 5.43 6.05 6.23 6.89 7.39 6.97 7.57 10.04 10.70
50 50 10 10 8 7 9 9 50 50
Cb G Cb. G G Cb G Cb G
EC BC

279.92 275.65 275.09 274.51 271.27
1.69 5.96 6.52 7.10 10.34
50 7.5 7.5 50

281.61

NWBP Catalina & Santa Barbara

Levels Alley "A" Block G
Riviera Villas Contd.

1+39.2 E Sewer MH. on line

1+32.58 EC.

1+15.37 BC. Sewer MH. 9" Rt

1+00

0+50

0+25

28260

1

Q

278.31
x 29
Rim

278.8 278.2 278.47 278.2 277.8
38 x x 13 x x 8
20 75 Hub 75 20

278.5 277.3 276.88 276.1 275.95 276.0
x 1 5 3 5 72 6 55 6 55 6 5
20 75 Hub 75 5.4 15
Rim

278.5 277.9 277.1 276.6 275.2
x 1 x 7 5 5 6 0 7 x
20 75 7.5 20

278.4 277.5 277.0 276.3 275.1
x 2 5 1 5 6 6 3 7 5
20 75 75 20

277.9 277.1 276.1 276.0 275.0
x 7 5 5 6 5 6 6 7 5
20 75 7 5 20

28260

Levels Alley "A" Block "G"
Riviera Villas Cont'd

3+00

2+50

2+27.5 End Conc Wall (under Const)

2+00

1+62.63 Beg Conc Wall (under Const.) 7.5 Rt

T.P. 11.86 293.97 0.49 282.11

1+50

282.60

291.9 290.9 290.5 290.3 289.9
2.1 3.1 3.5 3.7 4.1
20 7.5 7.5 20

288.3 287.5 287.1 287.1 286.5
5.7 6.5 6.9 6.9 7.5
20 7.5 7.5 20

286.3 285.8 285.4 285.4 285.38 281.5 282.7 285.0
7.7 8.3 8.6 8.6 8.59 12.5 11.5 9.0
20 7.5 7.5 (Gr wall) 7.5 (footing) 16 16

284.3 283.5 283.4 283.3 283.31 281.4 282.2 281.9
9.7 10.5 10.6 10.7 10.66 12.6 11.8 12.1
20 7.5 7.5 7.5 (Top form) 7.5 (footing) 9 20

281.2 282.00 279.9
12.8 11.97 14.1
7.5 7.5 7.5
(Top form) (Wall) (footing)

293.97
280.2 280.1 279.7 279.5 278.8
2.4 2.5 2.9 3.3 3.8
20 7.5 7.5 20

282.60

Levels Alley A Block Block 'G'
Riviera Villas

℄

TP (Contd p.54) 1.16 292.81 on Hub Rt 3+37.25

	293.7	293.0	292.8
3+37.44	0^{3}	1^{0}	1^{2}
	7^{5}		7^{5}

293.97 293.97

Levels Alley B Block G
Riviera Villa

0+18

0+00 No Line Hill St. (Edge Asph Pav & End Cbs).

0-10 EC Alley Pts.

0-12 No Cb Line Hill St.

0-30 ℄ Hill St. (Edge Asph. Paving)

T.P 939 302.20

℄

299.8 298.4 297.1 296.8 295.6
2+ 3.8 4.5 5.4 6.6
20 7.5 7.5 20

299.4 298.4 297.61 296.1 296.20 296.37 295.20
2.8 3.80 4.59 5.50 6.00 5.83 7.0
20 7.4 7.4 7.5 7.5 20
Cb G G Cb

298.08 297.36 296.38 295.73 296.00
4.12 4.84 5.82 6.47 6.30
7.9 7.8 7.5 7.5
Cb E G Cb

301.84 301.16 298.12 297.44 297.27 296.36 295.65 295.41 295.96 291.33 291.98
0.36 1.04 4.08 4.76 4.93 5.84 6.55 6.79 6.24 10.87 10.22
50 50 9.4 9.4 7.9 7.5 9.5 9.5 50 50
Cb G Cb E G G E Cb E Cb
BC BC

301.51 297.54 296.78 296.00 291.68
0.69 4.66 5.42 6.20 10.52
50 7.5 7.5 50

302.20

Hub Rt of 3+37.25 (P.53)

Levels Alley "B" Block 6"
Riviera Villa.

1+48

1+44.38 BC. Beg wire fence 7.0 Lt

1+00

0+81 Power Pole # A-1027 7' Lt.

0+80

0+76

0+50

302.20

297.7 297.0 296.1 295.4 294.4
4.5 5.2 6.1 6.8 7.8
20 7.5 7.5 20

299.9 299.4 296.3 296.04 295.3 294.4
2.3 2.8 5.7 6.16 6.9 7.8
20 7.5 2 Hub 7.5 20

300.0 299.4 297.8 297.0 296.2 295.2
2.2 2.8 4.4 5.2 6.0 7.0
20 8.5 6. 7.5 20

300.1 299.4 298.6 297.4 296.9 298.1 295.3
2.1 2.8 3.6 4.8 5.3 5.5 6.9
20 10 7.5 4 7.5 20

299.1 297.9 296.9 296.7 295.4
3.1 4.3 5.3 5.5 6.8
20 7.5 7.5 20

299.3 298.3 297.9 297.2 295.8
2.9 3.9 4.3 5.0 6.4
20 7.5 7.5 20

302.20

Levels Alley "B" Block "G"
Riviera Villas

2+78.39

2+51.69

2+39 Power Pole # A1055 6.3' Lt

TP	3.35	296.16	939	29281

2+24.99 Wire fence 5.8 Lt

2+19 Sewer MH ℄ 5' Lt

2+09.36 (Wire fence 5.5 Lt)

1+76.87

302.20

℄

292.4	291.8	291.5	290.7	290.1
3.8	4.4	4.2	5.5	6.1
20	7.5		7.5	20

293.6	292.1	292.4	292.2	291.4
2.6	3.5	3.8	4.0	4.8
20	7.5		7.5	20

296.16

on Hub Rt 2+24.99

295.0	294.1	293.4	292.8	292.3
7.2	8.1	8.8	9.4	9.9
20	7.5		7.5	20

293.41
8.79
0.5
Rim

295.50	294.8	294.0	293.7	292.6
6.1	7.4	8.2	8.5	9.6
20	7.5		7.5	20

298.3	296.2	295.2	294.6	293.7
3.9	6.0	7.0	7.6	8.5
20	7.5		7.5	20

302.20

Levels Alley "B" Block G
Riviera Villas

4+10	End Conc Drive on Rt.			
3+96	Beg Conc Drive on Rt.			
3+85.19				
3+58.49				
3+32	Power Pole # A1075 7.5 Lt.			
3+31.79				
T.P.	4.05	292.00	8.21	287.95
3+05.09				
		296.16		

℄

284.43	284.64
7^{57}	7^{36}
7^{8}	20
Drive	Drive
284.67	284.65
7^{33}	7^{35}
7.5	20
Drive	Drive

287.4	287.5	287.5	286.9	285.2	284.8
4^{6}	4^{5}	4^{5}	5^{1}	6^{8}	7^{2}
20	7^{5}		5	8	20

288.4	288.2	288.0	287.6	286.0	285.5
3^{6}	3^{8}	4^{0}	4^{4}	6^{0}	6^{5}
20	7^{5}		7^{5}	11	20

289.7	289.2	288.8	288.4	287.7
2^{3}	2^{8}	3^{2}	3^{6}	4^{3}
20	7^{5}		7^{5}	20

292.00

291.0	290.4	290.1	289.3	288.56
5^{2}	5^{8}	6^{1}	6^{9}	7^{6}
20	7^{5}		7^{5}	20

296.16

Levels Alley "B" Block G.
Riviera Villas

B.M.			7.58	284.20	284.22
T.P.	4.52	291.78	4.74	287.26	
4+68.58	℄ Santa Barbara				
4+48.58	So. Cb Line Santa Barbara.				
4+26.58	BC Alley Ret.				
4+38.58	So. Line Santa Barbara			End Cbs Edge Asp. pav.	
4+11.89					
		292.00			

℄

NE BR Moana Dr. & Santa Barbara

284.84	283.30	283.01	282.74	281.24
7.6	8.70	8.99	9.26	10.76
50	7.5		7.5	50

284.90	284.21	283.43	282.76	282.70	282.38	282.16	282.16	282.71	280.64	281.33
7.10	7.79	8.57	9.24	9.30	9.62	9.84	9.84	9.29	11.36	10.67
50	50	9.5	9.5	7.5		7.4	9.4	5.4	50	50
Cb	G	Cb	G	G		G	G	Cb	G	Cb

RC

283.36	282.81	282.41	282.85	
8.64	9.19	9.59	9.15	
7.5	7.5	7.4	7.4	
Cb	G	G	Cb	

283.57	283.17	282.78	282.90	283.05
8.43	8.83	9.22	9.10	8.95
7.5	7.5		7.5	7.4
Cb	G		G	Cb

286.2	286.3	285.7	285.1	284.7	284.6
5.8	5.7	6.3	6.9	7.3	7.4
20	12	7.5		7.5	20

292.00

34984
80
26984

74 87
1.32 58
2.27 45

4410